

3GPP2 S.R0139-0

Version 1.0

July 28, 2011



3RD GENERATION
PARTNERSHIP
PROJECT 2
"3GPP2"

Femtocell Systems Overview

for cdma2000 Wireless Communication Systems

© 2011 3GPP2

3GPP2 and its Organizational Partners claim copyright in this document and individual Organizational Partners may copyright and issue documents or standards publications in individual Organizational Partner's name based on this document. Requests for reproduction of this document should be directed to the 3GPP2 Secretariat at secretariat@3gpp2.org. Requests to reproduce individual Organizational Partner's documents should be directed to that Organizational Partner. See www.3gpp2.org for more information.

Revision History

Version	Description	Date
v0.13	Initial Publication Version	July 28, 2011

Table of Contents

1		
2		
3	Table of Figures	iii
4	Table of Tables	iv
5	Foreword.....	v
6	1. SCOPE	1
7	2. INTRODUCTION	1
8	2.1 Document Conventions.....	1
9	2.2 References.....	2
10	3. DEFINITIONS AND ABBREVIATIONS	4
11	4. FEMTOCELL SYSTEM FEATURES AND ARCHITECTURE OVERVIEW	6
12	4.1 Architecture and Interfaces	6
13	4.1.1 Femtocell Architecture for cdma2000 1x Circuit-Switched Services.....	7
14	4.1.2 Femtocell Architecture for HRPD and cdma2000 1x Packet Data	9
15	4.2 Features and Specifications	10
16	4.2.1 Femtocell Subscriber Features and Services	10
17	4.2.2 Test Specifications	12
18	5. FEMTOCELL SYSTEM GUIDELINES.....	13
19	5.1 Deployment Phases.....	13
20	5.2 Radio Frequency Planning.....	15
21	5.2.1 Dedicated Frequency and Co-Channel Deployment Scenarios	15
22	5.2.2 Narrow-band and Broad-band Signal Sampling	17
23	5.2.3 Femtocell Discovery.....	18
24	5.2.3.1 Beacon Based Femtocell RF Design	19
25	5.2.4 Beacon-less Femtocell System Design.....	21
26	5.2.4.1 Preferred User Zone List (PUZL)	21
27	5.2.4.2 MS Autonomous Construction of PUZL.....	22

1	5.3	Provisioning and Configuration.....	24
2	5.3.1	Macrocell Configuration in Support of Femtocells.....	24
3	5.3.1.1	Neighbor List Configuration for Support of Legacy MSs	24
4	5.3.1.2	Femtocell Pilot PN Offset Planning Options.....	27
5	5.3.1.3	Neighbor List Configuration for FAMs.....	29
6	5.3.1.4	Transition Issues from Legacy to FAM Support.....	30
7	5.3.2	Femtocell Configuration and Provisioning.....	32
8	5.3.2.1	General	32
9	5.3.2.2	Timing and Synchronization	33
10	5.3.2.3	Location	35
11	5.3.2.3.1	General.....	35
12	5.3.2.3.2	Forward Link Traingulation Techniques.....	36
13	5.3.2.3.3	Other Techniques.....	36
14	5.3.2.4	Femtocell PN Offset Planning.....	36
15	5.3.2.5	FAP Transmit Power	38
16	5.3.2.6	Configuration of Other Radio Parameters in a Femtocell	39
17	5.3.2.7	SeGW and FMS Discovery by FAP.....	39
18	5.3.3	Network Level Configuration and Provisioning	39
19	5.4	Interference Management	40
20	5.4.1	Interference between Macro- and Femto-cell	41
21	5.4.2	Inter-Femto Interference.....	41
22	5.4.3	Out-of-Band Interference	43
23	5.5	Access Control	43
24	5.5.1	Types of Access	43
25	5.5.2	Open Access.....	44
26	5.5.3	Non-Open Forms of Access.....	44
27	5.5.3.1	Restricted Access.....	45
28	5.5.3.2	Signaling Association	45
29	5.6	Femtocell System Security Aspects.....	46
30	5.6.1	FAP Device Authentication	46
31	5.6.2	FAP Device Identity.....	46
32	5.6.3	FAP Secure Environment	47
33	5.6.4	FMS Security	47
34	5.7	Mobility in Femtocell Systems.....	47

1	5.7.1	cdma2000-1x Procedures	48
2	5.7.1.1	Idle Handoff Procedures.....	48
3	5.7.1.1.1	Hand-Out	48
4	5.7.1.1.2	Hand-In	49
5	5.7.1.2	Active State Handoff Procedures	51
6	5.7.1.2.1	Hand-Out	51
7	5.7.1.2.2	Hand-In	52
8	5.7.2	HRPD Procedures.....	54
9	5.7.2.1	Idle Handoff Procedures.....	55
10	5.8	Sevices Aspects of Femtocell Systems	55
11	5.8.1	Local IP Access (LIPA).....	55
12	5.8.2	Remote IP Access (RIPA).....	56
13	5.8.3	Emergency Call Services	56
14	5.8.4	Supplementary Service Support	57
15	5.9	Minimum Performance Standards	57
16	5.9.1	Introduction	57
17	5.9.2	Femtocell Base Station Transmitter MPS Requirements.....	57
18	5.9.3	Femtocell Base Station Receiver MPS Requirements.....	58

19

20 Table of Figures

21

22	Figure 4.1-1: Simplified cdma2000 1x Circuit-Switched Service Femtocell Network Architecture	
23	with MSC.....	8
24	Figure 4.1-2: Simplified HRPD/cdma2000 1x Packet Femtocell Network Architecture.....	9
25	Figure 5.1-1: Network State Evolution and Femtocell Penetration.....	14
26	Figure 5.2-1: RF deployment scenarios for femtocell systems	16
27	Figure 5.2-2: Narrow-band and broad-band sampling.....	17
28	Figure 5.2-3: Hopping Beacon Transmission Timing	20
29	Figure 5.4-1: Macro- and Femtocell Pilot Phases – PILOT_INC Approach.....	26
30	Figure 5.4-2: Macro- and Femtocell Pilot Phases – Partition Approach	28
31	Figure 5.5-1: Femtocell and a closely located macro MS	41
32	Figure 5.5-2: Inter-femto Interference Scenarios	42
33	Figure 5.9-1: Simplified LIPA/RIPA Architecture.....	56

1
2
3
4
5
6
7
8
9
10
11

Table of Tables

Table 4.2-1. Femtocell System and Subscriber Features and Services	10
Table 4.2-2 Test Specifications	Error! Bookmark not defined.
Table 5.2-1: Contents of CDMA Channel List Messages	19
Table 5.3-1: Pilot PN Offset Planning Examples	29
Table 5.3-2: Comparative Evaluation of Synchronization Techniques	34

1 **Foreword**

2

3 This foreword is not part of this Technical Report.

4 “Femtocell System Overview for cdma2000 Wireless Communication Systems” is
5 published by 3GPP2, and may be republished by its Market Representation Partners
6 (MRPs) in efforts to assist in proliferation and deployment of femtocells.

1

2 1. SCOPE

3 This document is intended as a guide to wireless network operators, FAP
4 (Femtocell Access Point) vendors and other Infrastructure vendors to assist
5 in the deployment of 3GPP2 femtocell systems. Every effort was made to
6 make the contents of this document consistent with other cdma2000¹
7 femtocell related specifications developed in 3GPP2. If any ambiguity exists,
8 3GPP2 technical specifications shall take precedence. As femtocell systems
9 evolve and their standardization continues into subsequent system releases,
10 this Overview will be updated accordingly, within those subsequent releases.

11 This document is informative. As such, any usage of normative-sounding
12 language (e.g., “shall”, “should”, and “may”), if used on occasion, should be
13 viewed contextually, e.g., as operational advice to operator, not as a system
14 or feature requirement. It is of note that 3GPP2 feature/service
15 requirements developed by TSG-S Stage 1 and SRD contain normative
16 language, strictly speaking, only if that language appears within clearly
17 enumerated requirement statements (see for example S.R0126 [7]).
18

19 2. INTRODUCTION

20 This document describes the key features of the 3GPP2 femtocells that have
21 been specified in various 3GPP2 specifications. This document further
22 serves as a femtocell deployment guide and recommends exemplary
23 procedures and parameter settings and addresses the issues that are
24 considered useful in a real world phased deployment scenario.

25 Deployment decisions and procedures which are different than those
26 discussed in this document are feasible, and are in no way prohibited by the
27 contents of this document.

28 2.1 Document Conventions

29 “Shall” and “shall not” identify requirements to be followed strictly to
30 conform to this document and from which no deviation is permitted.
31 “Should” and “should not” indicate that one of several possibilities is
32 recommended as particularly suitable, without mentioning or excluding
33 others, that a certain course of action is preferred but not necessarily
34 required, or that (in the negative form) a certain possibility or course of
35 action is discouraged but not prohibited. “May” and “need not” indicate a
36 course of action permissible within the limits of the document. “Can” and
37 “cannot” are used for statements of possibility and capability, whether
38 material, physical or causal.

¹ cdma2000[®] is the trademark for the technical nomenclature for certain specifications and standards of the Organizational Partners (OPs) of 3GPP2. Geographically (and as of the date of publication), cdma2000[®] is a registered trademark of the Telecommunications Industry Association (TIA-USA) in the United States.

2.2 References

This section contains a list of specifications and other documents that are used as references in this document. All references are informative. The earliest applicable revision and, if listed, version, of a reference is listed. Unless otherwise stated, any subsequent revision and/or version update is equally applicable. If Revision is not listed, Rev. 0 (-0) is implied. User should consult the latest 3GPP2 publication for updated (publication version) information.

- [1] 3GPP2 A.S0024 Interoperability Specification (IOS) for Femtocell Access Points
 - [2] 3GPP2 C.S0001 Introduction to cdma2000 Standards for Spread Spectrum Systems
 - [3] 3GPP2 C.S0002 Physical Layer Standard for cdma2000 Spread Spectrum Systems [C.S0003]
 - [4] 3GPP2 C.S0003 Medium Access Control (MAC) Standard for cdma2000 Spread Spectrum Systems
 - [5] 3GPP2 C.S0004 Signaling Link Access Control (LAC) Standard for cdma2000 Spread Spectrum Systems
 - [6] 3GPP2 C.S0005-0 Upper Layer (Layer 3) Signaling Standard for cdma2000 Spread Spectrum Systems
 - [7] 3GPP2 S.R0126-0 System Requirements for Femto Cell Systems, May 2008
 - [8] 3GPP2 S.S0132-0 Femtocell Security Framework, January 2010
 - [9] 3GPP2 S.S0135-0 Network Architecture Model for cdma2000 Femtocell Enabled Systems, April 2010
 - [10] 3GPP2 C.S0010-D Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Base Stations
 - [11] 3GPP2 C.S0024-B cdma2000 High Rate Packet Data Air Interface Specification
 - [12] 3GPP2 C.S0032-C Recommended Minimum Performance Standards for cdma2000 High Rate Packet Data Access Network
 - [13] 3GPP2 X.S0059 cdma2000 Femtocell Network:
 - 000 Overview
 - 100 Packet Data Network Aspects
 - 200 1x and IMS Network Aspects
 - 400 1x Supplementary Service Aspects
- Editor's Note: The above document is a work in progress and should not be referenced unless and until it is approved and

- 1 published. Until such time as this Editor's Note is removed, the
2 inclusion of the above document is for informational purposes
3 only.
- 4 [14] 3GPP2 X.R0063-0 Femtocell Configuration Parameters
5 Editor's Note: The above document is a work in progress and
6 should not be referenced unless and until it is approved and
7 published. Until such time as this Editor's Note is removed, the
8 inclusion of the above document is for informational purposes
9 only.
- 10 [16] Broadband Forum: TR-196/TR-262 Amendment 2, CPE WAN
11 Management Protocol v1.1, December 2007
- 12 [17] Broadband Forum: TR-196 Femto Access Point Service Data
13 Model, April 2009
- 14 [18] 3GPP2 C.S0016-A Over-the-Air Service Provisioning of Mobile
15 Stations in Spread Spectrum Standards, December 2001
- 16 [19] 3GPP2 C.S0016-D Over-the-Air Service Provisioning of Mobile
17 Stations in Spread Spectrum Standards, January 2010
- 18 [20] 3GPP2 C.S0035-A CDMA Card Application Toolkit (CCAT),
19 August 2007
- 20 [21] 3GPP2 C.S0023 Removable User Identity Module (R-UIM)
21 for cdma2000 Spread Spectrum Systems
- 22 [22] 3GPP2 C.S0065-B cdma2000 Application on UICC for Spread
23 Spectrum Systems, January 2010
- 24 [23] 3GPP2 C.S0005-E Upper Layer (Layer 3) Signaling Standard
25 for cdma2000 Spread Spectrum Systems, June 2010
- 26 [24] IETF RFC 4306 Internet Key Exchange (IKEv2) Protocol,
27 December 2005
- 28 [25] 3GPP2 C.S0010-C Recommended Minimum Performance
29 Standards for cdma2000 Spread Spectrum Base Stations,
30 March 2006
- 31 [26] 3GPP2 C.S0032-B Recommended Minimum Performance
32 Standards for cdma2000 High Rate Packet Data Access
33 Network, May 2008
- 34 [27] 3GPP2 X.S0011-001-E v1.0, cdma2000 Wireless IP Network
35 Standard: Introduction, November 2009
- 36 [28] 3GPP2 A.S0013 Interoperability Specification (IOS) for
37 cdma2000 Access Network Interfaces - Part 3 Features
- 38 [29] 3GPP2 A.S0008 Interoperability Specification (IOS) for High
39 Rate Packet Data (HRPD) Radio Access Network Interfaces with
40 Session Control in the Access Network
- 41 [30] 3GPP2 A.S0009 Interoperability Specification (IOS) for High
42 Rate Packet Data (HRPD) Radio Access Network Interfaces with
43 Session Control in the Packet Control Function
44

1 **3. DEFINITIONS AND ABBREVIATIONS**

2 The terms and abbreviations which are used within this document
3 are listed as follows:

3GPP2	Third Generation Partership Project #2
AAA	Authorization, Authentication, Accounting
ACL	Access Control List
A/D	Analog to Digital
AN	Access Network
APPIM	Access Point Pilot Information Message
AT	Access Terminal
AWGN	Additive White Gaussian Noise
BIP	Bearer-Independent Protocol
BS	Base Station
CA	Certificate Authority
CCLM	CDMA Channel List Message
CDMA	Code Division Multiple Access
CFSCNM	Candidate Frequency Search Control Message
CFSRPM	Candidate Frequency Search Report Message
CFSRQM	Candidate Frequency Search Request Message
CPE	Customer Premises Equipment
CS	Circuit-Switched
CSIM	CDMA Subscriber Identity Module
dB	Decibel
DSL	Digital Subscriber Line
GPS	Global Positioning System
GSRDM	Global Service Redirection Message
EUI	Extended Unique Identifier
FAC	Femtocell Access Control
FAM	Femto-Aware Mobile
FAP	Femtocell Access Point
FCS	Femtocell Convergence Server
FEID	Femtocell Equipment Identifier
FGW	Femtocell Gateway
FL	Forward Link
FMS	Femtocell Management Server
HRPD	High Rate Packet Data
IC	Interference Cancellation

ICGI	IS-41 Cell Global Identifier (see Ref. [27])
ID	Identity
IE	Information Element
IEEE	Institute of Electrical and and Electronics Engineering
IETF	Internet Engineering Task Force
IKE	Internet Key Exchange
IMS	IP Multimedia Subsystem
IMSI	International Mobile Subscriber Identity
IOS	Interoperability Specification
IP	Internet Protocol
IPSec	Internet Protocol - Secure
km/h	Kilometers per hour
LAC	Link Access Control
LAN	Local Area Network
LAT	Latitude
LIPA	Local IP Access
LM	Legacy Mobile
LON	Longitude
LTE	Long Term Evolution
MCL	Minimum Coupling Loss
MHz	Megahertz
MPS	Minimum Performance Standard
MRP	Market Representation Partner
MS	Mobile Station
MSC	Mobile Switching Center
MSCe	Mobile Switching Center Emulation
NAT	Network Address Translator
NID	Network Identity
NL	Neighbor List
NLM	Neighbor List Message
OAM&P	Operation, Administration, Management & Provisioning
OTASP	Over-The-Air Service Provisioning
PCF	Packet Control Function
PDSN	Packet Data Serving Node
PMRM	Power Measurement Report Message
ppb	parts per billion
PSAP	Public Safety Answering Point
PSMM	Pilot Strength Measurement Message

PUZL	Preferred User Zone List
PN	Pseudo Noise (or Pseudo-random Noise)
QoS	Quality of Service
RAN	Radio Access Network
RL	Reverse Link
R-UIM	Removable User Identity Module
RF	Radio Frequency
RFC	Request For Comment
RIPA	Remote IP Access
RoT	Rise over Thermal
Rx	Receiver
SA	Security Association
SeGW	Security Gateway
SID	System Identity
SMSPP	Short Message Service Point-to-Point
SNR	Signal-to-Noise Ratio
SON	Self-Organizing Networks
SRD	System Requirements Document
TLS	Transport Layer Security
TSG	Technical Specification Group
Tx	Transmitter
VPN	Virtual Private Network
WAN	Wide Area Network
WiFi	Wireless Fidelity
WLAN	Wireless Local Area Network

1

2 **4. FEMTOCELL SYSTEM FEATURES AND ARCHITECTURE OVERVIEW**

3

4 **4.1 Architecture and Interfaces**

5 This section provides an overview of the architecture and interfaces to support
6 Femtocell base station with cdma2000 network. Additional details are provided in
7 X.S0059-000 [13], A.S0024 [1], and S. S0135 [9]. Each of the documents contains
8 a view of the system architecture and interfaces from a slightly different
9 perspective within the network. The intent of this document is to offer a
10 supplemental general view without invalidating in any way the views offered in the
11 three listed specifications.

12

4.1.1 Femtocell Architecture for cdma2000 1x Circuit-Switched Services

Figure 4.1-1 and Figure 4.1-2 show the RAN reference architecture for IOS-based 1x access from a FAP with the support of the A1p/A2p and the A1/A2 interfaces, respectively. Figure 4.1-3 depicts SIP-based simplified femtocell network reference architecture for cdma2000 1x circuit-switched service access.

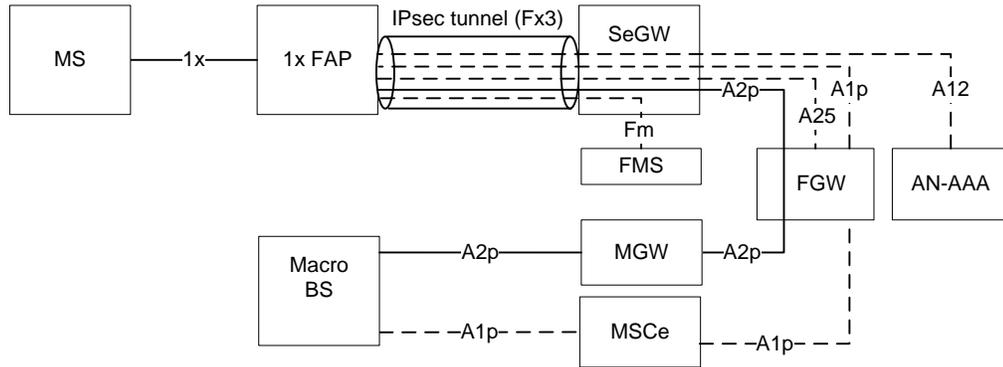


Figure 4.1-1 Femtocell IOS-based 1x Voice Architecture with A1p/A2p Interfaces

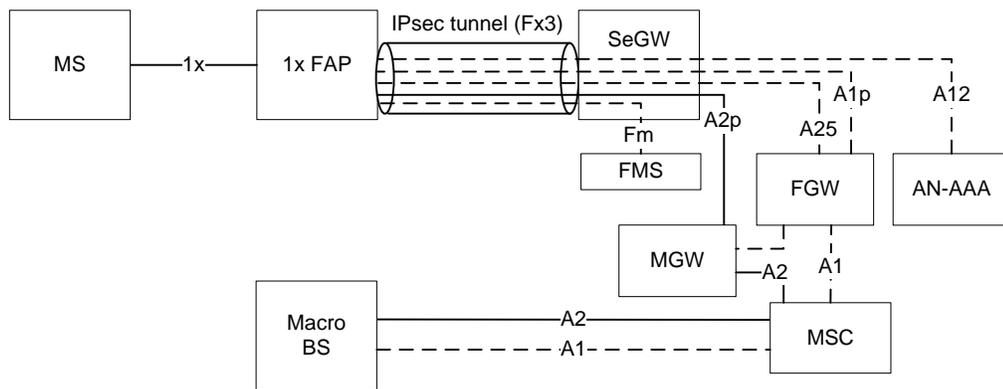


Figure 4.1-2 Femtocell IOS-based 1x Voice Architecture with A1/A2 Interfaces

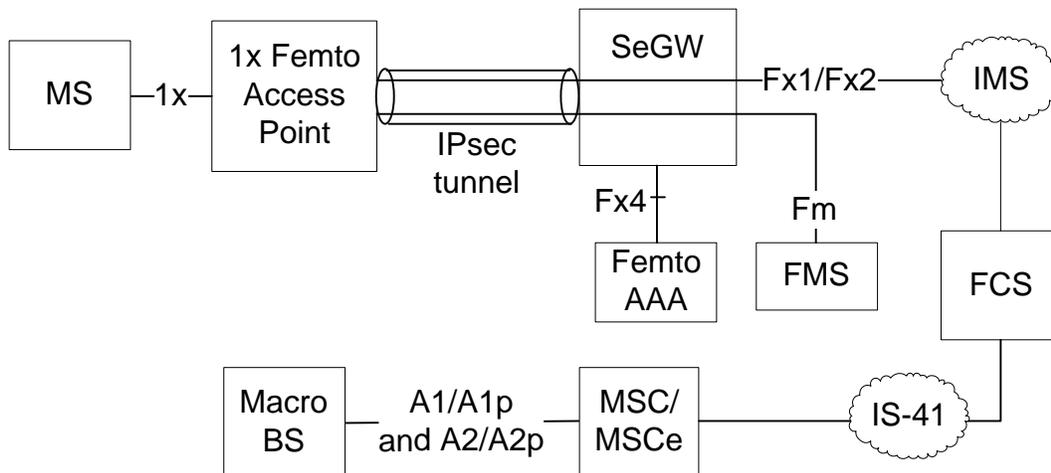


Figure 4.1-3: SIP-based simplified cdma2000 1x CS Service Femtocell Network Architecture with MSC

Femtocell Access Point (FAP): provides cdma2000 coverage in a small area, usually a private residence or a small office, and connects the MS to an operator's network via a broadband IP connection (e.g., DSL, cable). The FAP may operate in cdma2000 1x mode, HRPD mode, or both modes. The FAP may also provide the femtocell access control function.

Femtocell Convergence Server (FCS): provides equivalent functions to an MSC/VLR in the macro network, e.g., providing processing and control for calls and services. However, 1x CS FAP and FCS do not communicate using the legacy BS - MSC interface. Instead, Fx1 and Fx2 interfaces based on the IP Multimedia Subsystem (IMS) framework are used. From the perspective of a macro MSC, the FCS appears as another MSC and supports the X.S0011 [27] interface for inter-MSC communication.

The Femtocell Gateway /Femtocell Legacy Convergence Server (FGW/ FLCS) resides in an operator's network and provides gateway convergence functions between either an MSC (over the A1/A2 IOS interfaces), an MSCe (over the A1p/A2p IOS interfaces), or the MAP network (over the E interface) and the FAP (over the Fx6 interface). The FGW/FLCS provides aggregation, proxy, and signal routing functions for the FAPs to access services within the system operator's core network.

Femtocell Management System (FMS): is used for the auto-configuration of the FAP. FMS also supports configuration for Femtocell Access Control (FAC).

Femtocell Security Gateway (SeGW): provides secure communication between the FAP and the operator's core network. IP packets traversing between FAP and operator's core network are encapsulated in an IPsec tunnel. The SeGW is also responsible for authenticating and authorizing the FAP.

Femtocell AAA: provides an authorization function for FAP; may also provide FAC policy.

1 **4.2 Features and Specifications**

2

3 **4.2.1 Femtocell Subscriber Features and Services**

4 Table 4.2-1. Femtocell System and Subscriber Features and Services

Feature/Service	TSG-S	TSG-C	TSG-A	TSG-X	Comment
Femtocell Activation	S.R0126	<i>C.S0001~5</i>	A.S0024	X.S0059-100 X.R0063	Feature is also referred to as “FAP Power-Up”; Historically the term “Power-Up” has been used in the 3GPP2 specifications to include such activities as activation, authorization and registration. See A.S0024-0 Section 4.1.1 or X.S0059-100 Section 3.
Idle hand-in (cdma2000 1x)	S.R0126	<i>C.S0001~5</i>			
Idle handoff from FAP to macrocellular system (cdma2000 1x)	S.R0126	<i>C.S0001~5</i>	<i>A.S0013</i>		
Active hand-in (cdma2000 1x)	S.R0126	<i>C.S0001~5</i>	A.S0024	X.S0059-200	
Active hand-out(cdma2000 1x)	S.R0126	<i>C.S0001~5</i>	A.S0024	X.S0059-200	
Idle hand-in (HRPD)	S.R0126	<i>C.S0024</i>	<i>A.S0008</i> <i>A.S0009</i>	X.S0059-000	
Idle hand-out (HRPD)	S.R0126	<i>C.S0024</i>	<i>A.S0008</i> <i>A.S0009</i>	X.S0059-000	

3GPP2 S.R0139-0 v1.0

Connected State session transfer from FAP to macrocellular system (HRPD)	S.R0126	<i>C.S0024</i>	A.S0024-0 <i>A.S0008</i> <i>A.S0009</i>	X.S0059-000	
Connected State session transfer from macrocellular system to FAP (HRPD)	S.R0126	<i>C.S0024</i>	A.S0024-A <i>A.S0008</i> <i>A.S0009</i>	X.S0059-000	
Local IP Access (LIPA)		<i>C.S0024-A</i>	A.S0024-0	X.S0059-000 X.S0059-100	See A.S0024 Sections 2.5 and 4.3
Remote IP Access (RIPA)		<i>C.S0024-A</i>		X.S0059-000 X.S0059-100	
Location Services	S.R0126	<i>C.S0022</i> <i>C.S0001~5</i>	<i>A.S0024-0</i>	X.S0059-000 X.S0059-100 X.S0059-200 <i>X.S0002</i> <i>X.S0024</i>	
Emergency Services	S.R0126			X.S0059-000 X.S0059-100 X.S0059-200	
Short Message Service (SMS)	<i>S.R0126</i>	<i>C.S0001~5</i>	<i>A.S0024-0</i>	X.S0059-000 X.S0059-200	

Call Origination	<i>S.R0126</i>	<i>C.S0001~5</i>	<i>A.S0024-0</i>	X.S0059-000 X.S0059-200	
Call Termination	<i>S.R0126</i>	<i>C.S0001~5</i>	<i>A.S0024-0</i>	X.S0059-000 X.S0059-200	

1
2
3
4
5
6
7
8

Note: Some specifications required for Femtocell support have no explicit references to femtocells. Those specifications are said to be “transparent” to femtocells. Transparent specifications are listed in Table 1 in *blue italic font*.

4.2.2 Test Specifications

Table 4.2-2 Test Specifications

Feature/Service	TSG-S	TSG-C	TSG-A	TSG-X	Comment
Minimum Performance Standard (MPS) for FAP Transmitter (cdma2000 1x)	S.R0126	C.S0010-D			
Minimum Performance Standard (MPS) for FAP Receiver (cdma2000 1x)	S.R0126	C.S0010-D			
Minimum Performance Standard (MPS) for FAP Transmitter (HRPD)	S.R0126	C.S0032-C			
Minimum Performance Standard (MPS) for FAP Receiver (HRPD)	S.R0126	C.S0032-C			

1

2 **5. FEMTOCELL SYSTEM GUIDELINES**

3 This section contains general guidelines for the phased deployment of
4 femtocell systems and details the recommended procedures and parameter
5 settings corresponding to the individual feature or service aspect.

6 A number of technical possibilities and deployment options are discussed.
7 However, this does not imply mandatory support of these features, either in
8 products, or in terms of deployment.

9

10 **5.1 Deployment Phases**

11 Femtocell systems are an evolving technology, expected to offer an
12 increasing array of features, as wireless communication systems evolve from
13 the traditional macro-system model to the one which uses femtocells as
14 prominent deployment feature. This evolutionary path is gradual, though
15 marked with distinct events associated with introduction of Mobile Stations
16 (MSs) with various capabilities, called Types herein:

- 17 • Type A: Legacy MSs;
- 18 • Type B: Femto-aware mobiles (FAMs) supporting unchanged radio
19 interface;
- 20 • Type C: FAMs supporting updated revisions of radio interface.

21 With Type A, the wireless network assumes an MS which has no awareness
22 of Femtocell Access Point (FAP) presence in the network. The MS contains
23 no enhancements (be it built-in or provisioned later) designed to operate
24 with a FAP.


25 Type B MS design is enhanced (e.g., to detect a presence of femtocell), while
26 it can still operate with an unchanged radio interface. MS supports internal
27 configurations, be it provisioned by the network, self-provisioned, or built-in,
28 all designed with the specific purpose of femtocell operation with increased
29 efficiency, flexibility, and versatility. This results in improved
30 communication performance (e.g., faster FAP discovery for hand-in to a FAP)
31 or better system performance (e.g., ability to operate a FAP without relying
32 on pilot beacons). Thus the operator can offer improved performance
33 associated with femtocells, while having more flexibility with any plans for
34 radio interface evolution in its network.

35 Type C MS has further awareness of Femtocell System in terms of being able
36 to receive system configuration messages introduced with the specific
37 purpose to support femtocell systems.

38 Although marked with distinct events of initiation of deployment of different
39 types of MSs, these types can overlap in a given network, i.e., the network
40 can support a mix of legacy MSs and one or both types of FAMs
41 simultaneously.

1 From the network configuration perspective, there are several distinct states
 2 of deployment:

- 3 State 0: Macro system state (pre-femtocell deployment)
- 4 State 1: Network configured to support femtocells with legacy MSs (Type A)
- 5 State 2: Network configured to support femtocells with legacy MSs and
 6 FAMs without radio interface change (i.e., Types A and B)
- 7 State 3: Network configured to support femtocells with legacy MSs and MSs
 8 with or without radio interface change (i.e., Types A, B, and C)

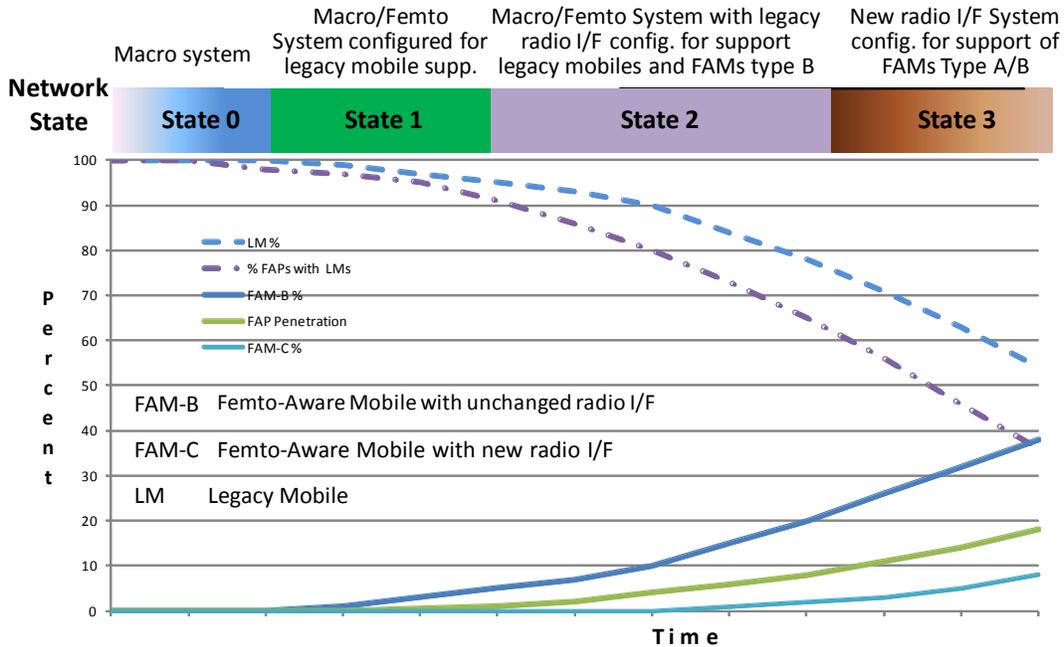

9
 10 Figure 5.1-1: Network State Evolution and Femtocell Penetration

11 This is depicted in the diagram on Figure 5.1-1. Note that the diagram is
 12 strictly illustrative, not meant as a forecast.

13 The diagram shows migration through Network States from State 0 through
 14 State 3, with the mix of MSs of various kinds, as well as FAP penetration
 15 (percentage of MSs associated with at least one FAP, e.g., percent of those
 16 MSs owned by members of a household with a FAP installed).

17 An operator can start “seeding” (activating in advance) FAMs prior to an
 18 actual network configuration in support of femtocells. Alternatively, FAM
 19 deployment can coincide with, or be deferred until network configuration for
 20 femtocells (State 1) is conducted.

21 When deciding to start femtocell deployment, operator configures the
 22 network to State 1, which supports femtocells using legacy MSs (Type A).
 23 Operator can choose to leave the network in this state for a long time,
 24 meanwhile allowing the percentage of Type B and later Type C MSs, as well
 25 as FAP penetration to increase, as well as percentage of FAPs associated
 26 with legacy MSs to drop.

1 Operator may then decide to move to State 2 configuration, in which Type B
2 MSs are fully supported, noting that by that time the percentage of Type B
3 MSs may be considerable. Operator can choose to leave the network in this
4 state for a long time, meanwhile allowing the percentage of Type B and C
5 MSs, as well as FAP penetration to increase, and possibly percentage of
6 FAPs associated with legacy MSs to drop.

7 Operator may then optionally, with full discretion in terms of decision and
8 timing, upgrade the network to State 3, in which all MS types are fully
9 supported.

10 As evident in the above outline, network operator can migrate the network
11 through all these states. Alternatively, operator may choose to skip certain
12 state or states, such as 1, 2, or 3. Each operator should carefully evaluate
13 the strategy of migration of the network through these states, upon
14 considering the performance and other objectives for the system. One of the
15 purposes of this document is to assist cdma2000 operators in such
16 evaluation in their decision making process.

17

18 **5.2 Radio Frequency Planning**

19 **5.2.1 Dedicated Frequency and Co-Channel Deployment Scenarios**

20 There are two basic radio frequency planning scenarios for femtocell
21 deployment.

22 Scenario 1: Dedicated RF carrier. In this scenario, one of the 1.25 MHz RF
23 carriers available to the operator is dedicated for femtocells, while others are
24 exclusively used by the macro system. If and when the operator chooses to
25 deploy HRPD femtocells, then the total of two 1.25 MHz RF carriers are
26 dedicated to femtocell deployment, while remainder can be used for the
27 macro system. In this scenario, the macrocell and the femtocell systems are
28 segregated in terms of RF spectrum use. A carrier with no adjacent macro
29 carriers may be preferred to avoid adjacent channel leakage from femtocells.

30 Scenario 2: Macro/femto co-channel deployment. In this scenario, the
31 macro system can share with femtocells some or all RF carriers that are
32 used by the macro system. When deploying femtocell systems, the operator
33 typically selects an RF carrier and deploys femtocells on that carrier, while
34 leaving macrocell frequency use unchanged. This effectively means that the
35 selected RF carrier shares the spectrum between the macro- and the
36 femtocell system. When HRPD femtocells are deployed, one of the HRPD RF
37 carriers is likewise selected for sharing between the macrocell and the
38 femtocell systems.

39 Figure 5.2-1 depicts schematically the two RF planning scenarios.

40

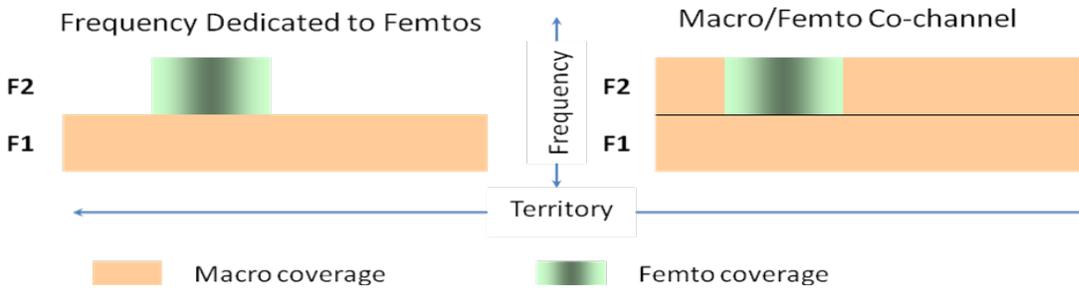


Figure 5.2-1: RF deployment scenarios for femtocell systems

In figure 5.2-1, femtocells are deployed on frequency F2. Frequency F1 is used exclusively for macro system. In the co-channel deployment scenario, frequency F2 is used by both the macrocell and the femtocell system.

Co-channel deployment scenario (2) has an advantage over the dedicated scenario 1 in many deployment scenarios in terms of total system capacity. This is because in scenario 2, frequency F2 can also carry macro system traffic, adding to the total capacity of the system. Whenever a MS is not in the vicinity of a femtocell, it can use frequency F2, in addition to frequency F1. Unless femtocells are deployed very densely, scenario 2 will yield higher system capacity. In the case of only 2 RF carriers, as shown in Figure 5.2-1, the macro system capacity for scenario 2 is approximately twice the capacity of scenario 1. However, if more than 2 RF carriers are available, the capacity gain of scenario 2 is not as pronounced. Thus, an operator concerned with the system capacity will often choose scenario 2, while an operator having much available spectrum may consider scenario 1 when balancing interference and system capacity issues. Proper interference management techniques, as described in section 5.4, are crucial to mitigate the impact of interference on the FL and RL macro performance, when choosing deployment scenario 2. One of the advantages of scenario 1 is that the interference between the macro system and the femtocell system may be easier to mitigate. Additionally, since the macro system may interfere less with the femtocell system, the coverage area of a femtocell is potentially larger than in the case of scenario 2. An operator may initially select scenario 1 if there is no capacity constraint, since interference control is one of the biggest risks in femtocell deployment. Then as capacity becomes constrained, particularly as data service uptake starts demanding more HRPD carriers, the operator may migrate to scenario 2, as the advantages of using femtocells begin to clearly outweigh the drawbacks.

The above scenarios discuss the case where only a single carrier is used for femtocell deployment. Although this might be sufficient for most deployments, very high femtocell deployment densities in the long-term may require multiple carriers to mitigate interference issues between femtocells. In very high density deployments, there is a tradeoff between inter-femto interference and impact to active macro users. An efficient way to balance this tradeoff is by using a scheme in which the operator allows femtocells to use multiple RF carriers, but assigns a preference order to these carriers. All or some of these carriers may be shared by the macro network depending on spectrum availability.


1 The frequency planning of cdma2000-1x and HRPD can be done
 2 independently, i.e., cdma2000-1x system can have dedicated femtocell
 3 spectrum, whereas HRPD may share macro frequency spectrum, since an
 4 operator may have different amount of spectrum available for femtocell
 5 deployment for the two technologies.

6

7 **5.2.2 Narrow-band and Broad-band Signal Sampling**

8 Frequently, an operator has many more RF carrier frequencies available
 9 than the two shown in Figure 5.2-1. In such cases, selecting which RF
 10 carrier to use for femtocell deployment should undergo a careful
 11 consideration. To illustrate this, we refer to figure 5.2-2, showing a case
 12 where a total of thirteen RF carriers (F1 to F13) are available to an operator.
 13 In principle, the operator may choose any one of the thirteen RF carriers for
 14 femtocell deployment. We show the case where the operator opted for a
 15 carrier somewhere in the middle of available band of carriers, F8.

16

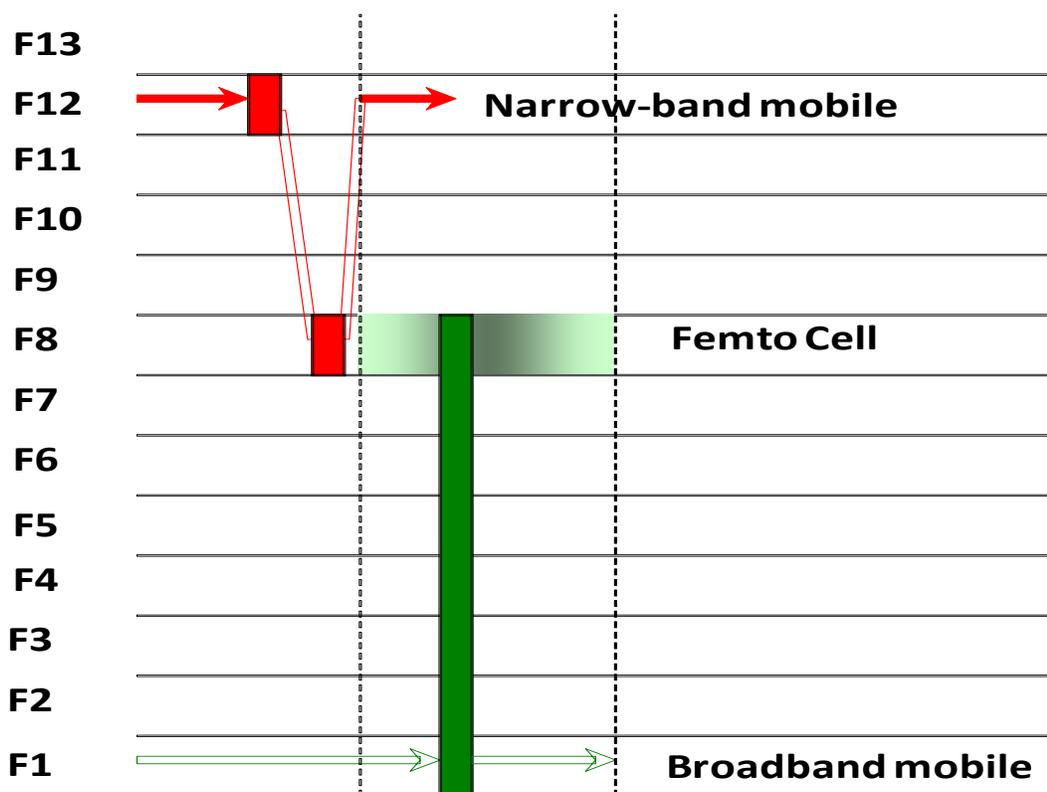

17

18

Figure 5.2-2: Narrow-band and broad-band sampling

19

20

21

22

23

24

To illustrate significance of this choice, we show cases of two MSs on the macro system. A MS using narrow-band sampling (“narrow-band mobile”) is shown in red, monitoring frequency F12. Another MS using broad-band sampling (“broadband mobile”) is shown in green. Each MS’s trajectory of travel is depicted schematically with arrows indicating that they each initially enter the coverage area of the subject femtocell operating on

1 frequency F8. We assume that both MSs are in idle mode, each monitoring
2 its assigned frequency. Hence they sample the RF signal during the paging
3 cycle's wake time, so that they can search for pages and for idle handoff
4 conditions (pilot E_c/I_0 of a new cell being at certain level to warrant idle
5 handoff to a new cell and start monitoring paging channel of that new cell).
6 In addition to that, if a FAM supports femtocells, and if it has an indication
7 to be in the vicinity of a target femtocell (details of how this indication of
8 being in the vicinity can be acquired by the MS are discussed in a later
9 chapter), it also samples the signal on frequency F8, not necessarily in every
10 paging cycle, but frequently enough to meet the target femtocell discovery
11 delay time.

12 In order not to miss any pages, narrow-band MS tunes to frequency F8 and
13 take a signal sample at a time that is different from its page wake cycle, then
14 retune back to frequency F12, and continue to monitor the paging channel
15 at the paging wake time.

16 In contrast to that, the broadband MS can take a signal sample across
17 several RF carriers, i.e., it can conduct multi-carrier sampling. This allows
18 it to be awake no more than it would be required to just monitor paging
19 channel on the macro frequency. The advantage of broadband (multi-
20 carrier) sampling is apparent. The broadband MS can save much power by
21 virtue of multicarrier sampling. However, the frequency range over which
22 this broadband sampling can occur is limited by the speed of the A/D
23 converter in the front end of the baseband processing hardware of the
24 broadband MS. This is the reason to select the femtocell frequency in the
25 middle of the frequency band range, if that range is extensive. By doing so,
26 the femtocell frequency can be reached by broadband sampling from either
27 side of the femtocell frequency, in the best case covering the entire range of
28 the spectrum controlled by the operator.

29 Broadband sampling MSs will be fielded at an increasing rate, and will quite
30 soon become a commonplace, as network capabilities migrate toward
31 broadband technologies such as HRPD Rev. B and LTE. Hence, operators
32 should take these technical issues into consideration when planning the
33 radio channel assignment for femtocells.

34 **5.2.3 Femtocell Discovery**

35 One of the critical problems with femtocells is enabling a MS to find the
36 femtocell, when the MS moves within coverage area of the femtocell.

37 Referring back to figure 5.2-2, each MS is hashed to one of the frequencies
38 listed in the CDMA Channel List Message broadcast on the paging channel
39 (see C.S0005 [6], Section 2.6.2.2.4). In the case depicted in Figure 5.2-2,
40 CDMA Channel List Message would contain the 13 RF carriers F1 ~ F13.
41 The MS registers on the frequency where it is hashed, monitors paging
42 channel on that frequency, and uses the access channel on that frequency
43 when initiating a call. This ensures uniform distribution of MSs across the
44 13 RF carriers, hence uniformly distributed access and paging channel load
45 across the available carriers.

1 However, unless a MS is hashed on frequency F8, it would not ordinarily
 2 detect the femtocell operating on that frequency. In the dedicated frequency
 3 deployment scenario, this would always be the case. To detect a femtocell
 4 on a different frequency, a MS needs to perform inter-frequency pilot
 5 searches, which may not be triggered unless macrocell signal quality is poor.

6 The following two solutions are offered to solve the problem of femtocell
 7 discovery:

- 8 1) Beacons, designed to support legacy MSs
- 9 2) Preferred User Zone List (PUZL), designed to support FAMS.

10

11 **5.2.3.1 Beacon Based Femtocell RF Design**

12 One way to remedy the situation for legacy MSs is to have the femtocell
 13 transmit a beacon on the frequencies other than the one where femtocell
 14 operates on. A cdma2000 1x beacon consists of pilot, paging and sync
 15 channels. An HRPD beacon consists of pilot, MAC and control channel.

16 When MS enters the femtocell coverage area and detects sufficient beacon
 17 pilot strength (generally 3 dB higher than the macrocell pilot it had been
 18 monitoring), it would perform idle hand-in (see Section 5.7.1.1.2). This
 19 entails reading the paging channel overhead messages. In cdma2000 1x
 20 paging channel carries messages such as CDMA Channel List Message
 21 (CCLM) or Global Service Redirection Message (GSRDM) that re-direct the
 22 MS from the beacon/macro frequency to the femtocell frequency. These
 23 messages are broadcast by the femtocell on the beacon on all 13
 24 frequencies. GSRDM can re-direct the MS to any frequency band where the
 25 femtocell is located. Alternatively CCLM can be used, but may have
 26 limitations in terms of band support. HRPD beacon control channel carries
 27 Redirection message for this purpose. Hence the MS will tune to F8, read the
 28 overhead messages broadcast by the femtocell, and register on the
 29 femtocellular system. More details about recommended SID/NID
 30 configuration of the femtocellular system are provided in Section 5.3.3.

31

32 Table 5.2-1: Contents of CDMA Channel List Messages

Cell Type, Frequency	CDMA Chanel List Contents
Macro Base Station, All Frequencies	[F1 .. F13]
FAP, Femtocell Frequency	F8
FAP, Beacon Frequencies	F8


33 Sections 5.7 on mobility procedures contain additional discussion on how
 34 beacons are used for idle and active state handoffs in femtocell systems.

35 Continuous transmission of beacons on all macro system frequencies would
 36 require complex RF transmitter design in the femtocell, in addition to
 37 consuming considerable additional power, and causing added interference in
 38 the macro system. To avoid these drawbacks, beacon can be transmitted in

1 a time shared fashion, referred to as hopping beacon. This is illustrated in
 2 Figure 5.2-3.

3

4

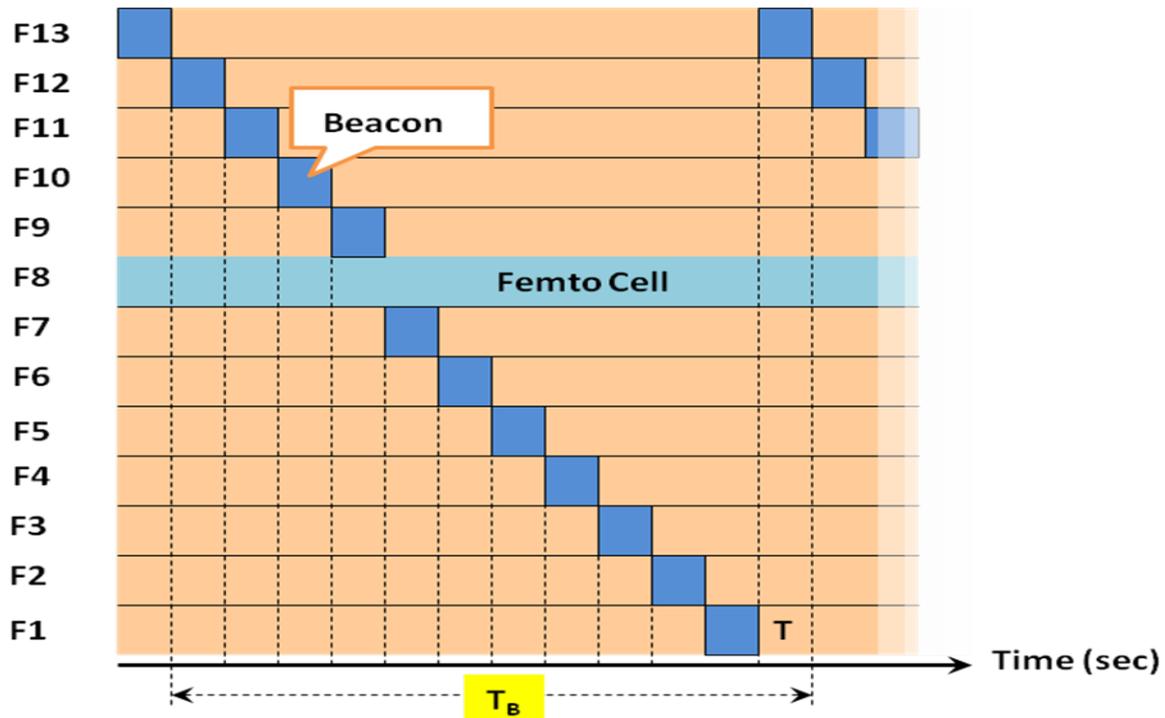

5

6

Figure 5.2-3: Hopping Beacon Transmission Timing

7 A pilot is searched during MS's wake-time of the slot cycle. Hence the
 8 beacon period T_B (time required to cover all slots on all beacon frequencies)
 9 shown in Figure 5.2-3 will be at least equal to the slot cycle time multiplied
 10 by the number of frequencies. For example, for a system set with slot cycle
 11 index of 1 (typical in many networks), the slot cycle time is 2.56 seconds, so
 12 T_B is at least $12 \times 2.56 = 30.72$ seconds, which represents the order of
 13 magnitude of the maximum delay of detection of a femtocell by a MS. Note
 14 that beacon transmission segments need not be identical to slot cycle
 15 segments; beacons can be designed to hop faster. The detection delay
 16 performance limitation is applicable to legacy MSs and for beacon-based
 17 femtocellular system design. As indicated earlier, femto-aware MSs can
 18 have a much reduced femtocell detection delay. These MSs need not rely
 19 upon beacons for femtocell detection. More details on FAMs are provided in
 20 later sections.

21 Two key design aspects of beacons are:

- 22 • Beacon transmit power calibration;
- 23 • Beacon scheduling

24 Though useful for femtocell discovery, beacon acts as interference to
 25 passing-by users who may not stay within femtocell coverage area for long.

1 This interference may degrade somewhat voice call quality of MSs in
2 femtocell vicinity. Therefore, it is critical to manage beacon interference and
3 simultaneously provide satisfactory beacon coverage inside the home. To
4 achieve this, a femtocell can self-calibrate beacon transmit power using
5 information about signal strength of the surrounding macro network. For a
6 properly calibrated femtocell and beacon transmit power, and properly
7 implemented interference management techniques, the impact on voice
8 quality should not be significant.

9 A beacon transmission schedule dwell time on each frequency (T) should be
10 long enough to allow a MS to read overhead messages from the beacon. For
11 active state hand-in implementation, the dwell time is long enough to cause
12 the MS to transmit PSMM upon detection of beacon (see more details on
13 active state hand-in in Section 5.7.1.2.2). At the same time, it is desirable
14 for the dwell time to be short to minimize the impact of beacon interference
15 on active macro calls of users in the femtocell vicinity.

16 HRPD beacon scheduling can be independent of cdma2000 1x beacon. By
17 time multiplexing cdma2000 1x and HRPD beacons, a single transmit chain
18 can be used for both in a dual-mode system. HRPD beacon duty cycle can
19 be lower, e.g., beacon can hop on HRPD frequencies once after several cycles
20 of hopping on cdma2000 1x frequencies.

21 It is also possible to further reduce HRPD beacon hopping, if the dual mode
22 FAP is capable of recognizing that a new cdma2000 1x MS has arrived and
23 has sent a registration message to this FAP. The FAP can suppress HRPD
24 beacon transmission until such a registration is recognized by the FAP. FAP
25 can then transmit HRPD beacons for a short period of time, allowing a dual-
26 mode MS/AT to discover HRPD FAP frequency.

27

28 **5.2.4 Beacon-less Femtocell System Design**

29

30 **5.2.4.1 Preferred User Zone List (PUZL)**

31 As part of enhancements to cdma2000 specifications to support femtocells,
32 the Preferred User Zone List (PUZL) feature capability, first introduced in the
33 Over-The-Air Service Provisioning C.S0016-A [18] was recently augmented to
34 enable efficient femtocell discovery/system selection by FAPs. Originally,
35 the concept of user zones was defined to support private and tiered services
36 (e.g., in a university or enterprise campus deployment). This concept has
37 been extended in C.S0016-D [19] to optimize MS performance in femtocell
38 deployments.

39 The updated PUZL is a database that can be customized and stored in each
40 MS, which defines a list of “user zones” within the macro network to aid the
41 MS in searching for and finding specific femtocells. Each PUZL entry (user
42 zone) is defined by geographical (GEO) information (e.g., latitude and
43 longitude) and/or RF coverage characteristics of the macro network (e.g.,
44 macrocell PN Offset, BASE_ID, SID/NID, etc.) around the femtocell. In
45 addition, the PUZL contains information about femtocell PN, frequency,

1 unique ID (Access Point Identifier – AP_ID), etc. that identify a subject
2 femtocell for each database entry. Thus, PUZL defines a “fingerprint” for
3 each femtocell (or a group of femtocells) of interest to a given FAM, which
4 allows this FAM to perform targeted search for a femtocell(s). For example, a
5 PUZL entry corresponding to a user’s home femtocell can be defined based
6 on the location of the home. Using this information, a user’s MS can
7 perform targeted search for the home femtocell only when it detects the
8 condition of being in or near the target locality (in this case its home), but
9 not when far away from the home. This reduces femtocell searches by
10 making system selection more efficient, thus extending stand-by battery life.

11 Another key feature of PUZL is that it allows a MS to distinguish between
12 desired (“whitelisted”) femtocells and non-desired (“blacklisted”) femtocells.
13 For example, if a MS cannot access service from a particular femtocell due to
14 access restriction imposed by the femtocell, such a femtocell can be
15 blacklisted in the PUZL database. Thus, upon encountering this femtocell, a
16 FAM can remain on the macro system, and avoid registration on restricted
17 femtocells. In addition, PUZL can eliminate the need to transmit beacons for
18 femtocell discovery because a FAM can directly search for a femtocell on the
19 frequency specified in PUZL. Thus, for example, a home-installed femtocell
20 with all MSs in the household having FAMs can suppress beacon
21 transmission.

22 PUZL provides flexibility to support cdma2000 1x, HRPD or hybrid 1x/HRPD
23 femtocells. The entire PUZL database or specific entries in PUZL can be
24 provisioned by the operator by means of Over-The-Air Service Provisioning
25 (OTASP) defined in C.S0016-D [19], SMS Point to Point (SMS-PP) defined in
26 C.S0035-A [20] (CDMA Card Application Toolkit) and Bearer-Independent
27 Protocol (BIP) [20]. In addition, the PUZL database can be augmented by
28 autonomous provisioning, either conducted by the FAM itself (exploratory
29 searches and database acquisition by learning the frequently acquired
30 femtocells), or assisted by user actions. For example, a user can trigger a
31 femtocell scan and select a new PUZL entry by adding a nearby femtocell
32 that transmits human readable text ID.

33 The network-provisioned information can be stored in the UIM, Removable
34 User Identity Module (R-UIM), CDMA Subscriber Identity Module (CSIM),
35 Smart Card or any other non-volatile database through traditional interfaces
36 defined in C.S0023 [21] and C.S0065 [22]. Future enhancements are aimed
37 at supporting the storage of learned PUZL entries in the Smart Cards.

38 39 **5.2.4.2 MS Autonomous Construction of PUZL**

40 PUZL database is customized in every MS, in accordance with that MS’s
41 patterns of movement and availability of femtocells in localities where this
42 MS expends considerable amounts of time in relatively stationary state (e.g.,
43 one’s home or office, a favorite café, friend’s home, certain shops, etc.). A
44 FAM may be able to autonomously construct its own PUZL, or supplement
45 one which may be initially configured. This process of autonomous PUZL
46 construction is also referred to as learning.

1 Exactly how a PUZL may be autonomously constructed by the MS learning
2 is subject to that MS design. Some possible approaches are briefly outlined
3 here. Note however, that this is not meant to either mandate or limit
4 possible repertoire of approaches.

5 The operator may configure a FAM with a kernel of PUZL at the time of
6 femtocell activation for a user. This can be done in a number of ways, for
7 example FAM may download an application (at the time of femtocell
8 activation in the user's household), which when invoked, based on the
9 SID/NID observed by the FAM, places a PUZL kernel in the FAM's UIM (be it
10 removable or not). This downloadable application may be administered by
11 the operator, which may have in its database all the necessary information
12 for the PUZL entry associated with the femtocell located in that user's home
13 (upon its activation). Otherwise, the kernel may just contain minimum
14 information needed for the FAM to facilitate the PUZL learning process:
15 SID/NID for the home system, and carrier frequency or frequencies where
16 femtocells are being deployed.

17 The fundamental process by which a FAM autonomously configures and
18 maintains its PUZL is exploratory searching for femtocells. Having acquired
19 a kernel, the FAM is effectively enabled to conduct exploratory searches.
20 When on the macro system indicated by the kernel's SID/NID, the FAM can
21 periodically or otherwise conduct exploratory searches on the frequency or
22 frequencies indicated by the kernel, in an effort to expand its PUZL. When a
23 new femtocell is found, the FAM determines whether or not it is open for
24 access to this MS, and if so, can place it in its PUZL. FAM can also
25 maintain the record of the last time each of its PUZL entries was actually
26 accessed. Hence, if it so happens that the number of PUZL entries
27 eventually exceeds the memory capacity dedicated to PUZL, the FAM can
28 replace the least used one, or least recently used one by the newly acquired
29 one.

30 When in the coverage of SID/NID other than that indicated by the kernel,
31 the FAM may expand the search to a broader set of RF carriers, or it may
32 use the aforementioned application to access the operator's database and
33 learn which frequencies, if any, are used in the current SID/NID for
34 femtocell deployment. Thus the FAM's exploratory search strategy may be
35 refined accordingly.

36 The frequency of exploratory searches is a subject to FAM design. Since
37 searching may involve tuning to a different frequency than the one currently
38 monitored by the FAM, it adds to battery consumption. An obvious
39 approach is to use periodic search, whenever the FAM is on the macro
40 system. A FAM may have means to be more selective when committing to
41 an exploratory search. For example, FAM may be able to make reasonable
42 determination on whether it has been in a stationary or near-stationary
43 state, and may commit to the exploratory search only when in such state for
44 an extended period of time (e.g., more than 30 minutes). The determination
45 on whether or not it is in such a state need not have absolute accuracy.
46 Reasonable likelihood would suffice. The evaluation of mobile vs. stationary
47 or semi-stationary state can be based on the constancy of set of macro base

1 stations that the FAM observes, and degree of variability of pilot phase
2 deviations over a set period of time.

4 **5.3 Provisioning and Configuration**

5 **5.3.1 Macrocell Configuration in Support of Femtocells**

6 One of the key objectives of the femtocell system deployment is to minimize
7 the impact on the macrocellular system. This is particularly important for
8 configuration of the macro system Radio Access Network (RAN). Ideally,
9 operator would not need to perform a major reconfiguration of radio access
10 parameters in the macro system, when deploying femtocells. This section
11 illustrates how operators can manage macro system configuration evolution
12 with such minimum impact in mind, as femtocell systems are deployed, and
13 as femtocell density increases, while the system capabilities improve from
14 legacy MS support to sophisticated FAMs, resulting in a well performing
15 fully integrated macro/femto system over time.

17 **5.3.1.1 Neighbor List Configuration for Support of Legacy MSs**

18 Initial configuration of the macro system should address the support of
19 legacy (femto-unaware) MSs. For a legacy MS to be able to search and find a
20 femtocell, the Pilot PN Offset used by the femtocell is explicitly included in
21 the neighbor list broadcast by the macro system. Our objective is not to
22 change the Pilot PN Offset configuration for the macrocells. This will allow a
23 relatively simple re-configuration of the neighbor lists, which can be
24 summarized as follows:

- 25 • Leave the list of macrocell neighbors unchanged in the Neighbor List
26 Message (NLM)
- 27 • Add a few new neighbors to each list, dedicated specifically for
28 femtocells

29 Table 5.3-1 at the end of discussion of Pilot PN Planning option (see Section
30 5.3.1.2 provides an example of neighbor lists for some planning options.

31 In other words, for each macrocell, take the existing list of macro neighbors,
32 and add to it a fixed list of femtocell neighbors. This fixed list of femtocell
33 neighbors is added throughout the system, e.g., throughout a given
34 metropolitan area, though the list may vary from one metropolitan area to
35 another.

36 The optimum approach would be to choose the fixed femtocell neighbor list
37 such that macrocells do not use any of the PN offsets from that list, i.e., the
38 macro neighbor PN offset pool and the femtocell neighbor PN offset pool are
39 distinct from each other.

40 This strategy allows the operator to continue planning the macro system
41 independently, and in an unchanged fashion, regardless of the femtocell
42 initial deployment and their evolution. For example, when operator places a
43 new macrocell in operation by cell splitting, it can do so without having to

1 worry about the impact of the choice of a PN offset for the new cell on any
 2 femtocell PN offsets that may be already deployed or will be deployed in the
 3 area. Likewise, the PN offset planning for the femtocells will be independent,
 4 confined to the pool of PN offsets reserved for femtocells.


5 Next, this is explained in a little more detail, using a specific example.

6 Parameter PILOT_INC is used when configuring neighbor list to outline
 7 spacing of PN Offsets in a network. The value of this parameter determines
 8 how many PN Offsets are available for assignment in a neighbor list. In the
 9 example used here, PILOT_INC value of 4 is assumed for the macro system,
 10 resulting in the total of $512/4 = 128$ total available Pilot PN Offsets in the
 11 pool which the macro network can use.

12 The spacing of PN Offsets is determined from the pilot signal period, which
 13 is $T_P = 2^{15} = 32,768$ chips (26.667 ms). This means that for the example of
 14 $PILOT_INC = 4$, the PN Offset spacing will be $26.667/128 \text{ ms} = 208 \mu\text{s}$. This
 15 is an important value with repercussions on macrocell radius and maximum
 16 search window size, which will be discussed later in more depth. Just as a
 17 reference, observe that the value of $208 \mu\text{s}$ corresponds to propagation delay
 18 distance of 63 km.

19 Pilot signals are all identical pseudo-random sequences shifted in time
 20 (phase) from each other. Owing to the periodic nature of these signals, it's
 21 convenient to illustrate Pilot PN Offsets in a radial coordinate system, as
 22 shown in Figure 5.3-1.

23

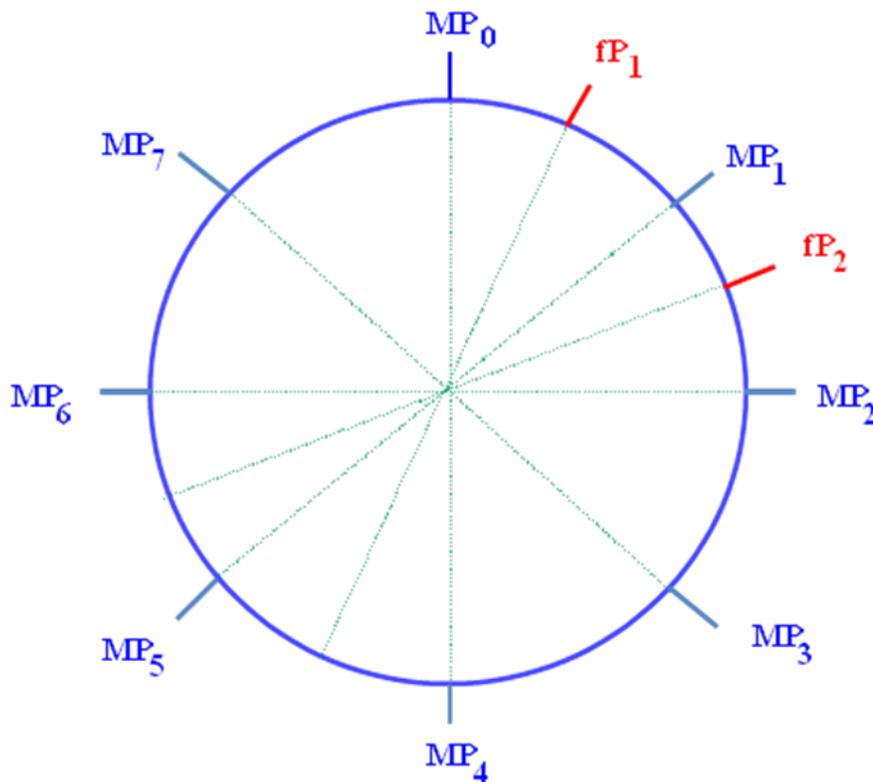

24

1 Figure 5.3-1: Macro- and Femto-cell Pilot Phases – PILOT_INC Approach

2 The example shown in figure 5.3-1 is for a higher value of PILOT_INC = 64,
3 resulting in the total of 8 distinct macro pilot PN offsets, MP_0 through PM_7
4 shown in blue. This is for the purpose of illustrating the concept without
5 making the figure too busy and illegible.

6 One convenient way to separate the Macrocell PN Offsets from Femtocell PN
7 Offsets, while retaining the macrocell PN Offset pool as it was prior to
8 femtocell deployments, is to place femtocell offsets exactly half way between
9 macrocell offsets. This is illustrated in Figure 5.4-1 as fP_1 and fP_2 shown in
10 red. Effectively, this means halving the value of PILOT-INC, but using the
11 macrocell PN Offsets as if no change in PILOT_INC took place (i.e., retaining
12 the pilot phase plan that existed prior to femtocell deployments). Thus one
13 of the objectives outlined earlier is fulfilled.

14 Viewed differently, upon decrementing PILOT_INC to half of the value it had
15 prior to femtocell deployment, the macrocells would use the even numbered
16 PN offsets, while femtocells would be assigned a small subset of odd
17 numbered PN offsets.

18 For the example of PILOT_INC = 4 prior to femtocell deployment, the pools of
19 macrocell and femtocell pilot phases are mathematically described as:

- 20 • 128 macrocell PNs @ $2\pi/256 * 2i$; $i= 0 ..127$
- 21 • 128 femtocell PNs @ $2\pi/256 * (2i+1)$; $i= 0 ..127$

22 The new value of PILOT_INC would be 2.

23 For the support of legacy MSs, the newly created phase space for femtocell
24 pilots would only partially be used. This is because of the NLM size
25 limitation. Operator can decide how many femtocell PN offsets to use for
26 this purpose. In further text it is assumed that a total of 5 femtocell pilot
27 offsets are reserved. However, that number can be higher or lower, as
28 operator determines, and it may be adjusted as femtocell system grows over
29 time. These reserved femtocell pilots are then reused in the system. This
30 may seem like a severe limitation in the number of available PN offsets for
31 femtocell. However, it should be kept in mind that in the initial phases of
32 femtocell deployment, their density will be relatively low for possibly several
33 years, and in many cases, the femtocells will actually be isolated, or in small
34 clusters. So, one can manage femtocell PN assignment reasonably well and
35 cope with interference between them. Over time, the fielding of femto-aware
36 MSs will allow expansion to a much bigger pool of Pilot PN Offsets for
37 femtocells, so that very high density of femtocells can be supported.

38 To summarize, for the purpose of legacy MS support with femtocells, the
39 operator can make the following system configuration adjustments to obtain
40 more PN Offsets:

- 41 • Decrement PILOT_INC to the half of its previous value
- 42 • Add to the NLM in each macrocell a fixed list of additional neighbors
43 to be used for femtocells from the pool $2\pi/256 * (2i+1)$, where i can
44 range from 0 to 4 in our example of 5 PN Offsets

1 Note that the operator need not choose the first 5 values from the odd Pilot
2 PN Offset range, in principle that can be any set of 5 distinct values within
3 the pool of 128 phases. However, there is no advantage in randomly
4 spreading the 5 PN offset across the available phase space.

5 Note that the method of Pilot phase planning described above is a
6 particularly convenient one, with least possible disruption to the operator's
7 RAN configuration management. Others methods can be used, per
8 operator's judgment (see Section 5.3.1.2).

9 If an operator had used in the macro system plan a PILOT_INC of an odd
10 value, then the methodology described cannot exactly be used. In those
11 cases, operator would probably have to use one of the other methods of Pilot
12 PN Offset planning described in Section 5.3.1.2.

13

14 **5.3.1.2 Femtocell Pilot PN Offset Planning Options**

15 The example in Section 5.3.1.1 shows how Pilot PN Offsets can be planned
16 with minimum impact on the macro system, and relatively easy
17 reconfiguration of Neighbor Lists. However, reducing the value of
18 PILOT_INC may not be feasible in each deployment case. For example, if
19 cells are broadly spaced and require large search window, while the initial
20 PILOT_INC results in dense phase spacing, an operator may judge that any
21 further reduction of PILOT_INC value is too risky, potentially creating
22 searcher ambiguity. This ambiguity arises, for example, when pilot signals
23 from two cells are detected within the same window, and are combined by
24 the receiver when they should not be – i.e., the searcher incorrectly assumes
25 that they are two multi-path components of the same signal. In addition to
26 that, a decrease in PILOT_INC results in an enlarged Remaining Pilot List.
27 Though MS searcher is not required to search over the Remaining List (or if
28 it does, may do so with reduced search frequency), the potential exists in
29 certain MS designs to expend too much effort on Remaining List searching,
30 which may reduce battery stand-by time. As a result, if the methodology for
31 Pilot PN Offset planning shown in Section 5.3.1.1 is decided to be deployed,
32 the operator should set SRCH_WIN_R to zero.

33 If an operator judges that a given deployment cannot use the PILOT_INC
34 approach, the first alternative is to clear a section of pilot phase space and
35 dedicate it to femtocells. This is illustrated in Figure 5.3-2. With PILOT_INC
36 unchanged, the MPn Pilot Phase space is re-programmed so that a section of
37 phase space is set aside for femtocells.

38

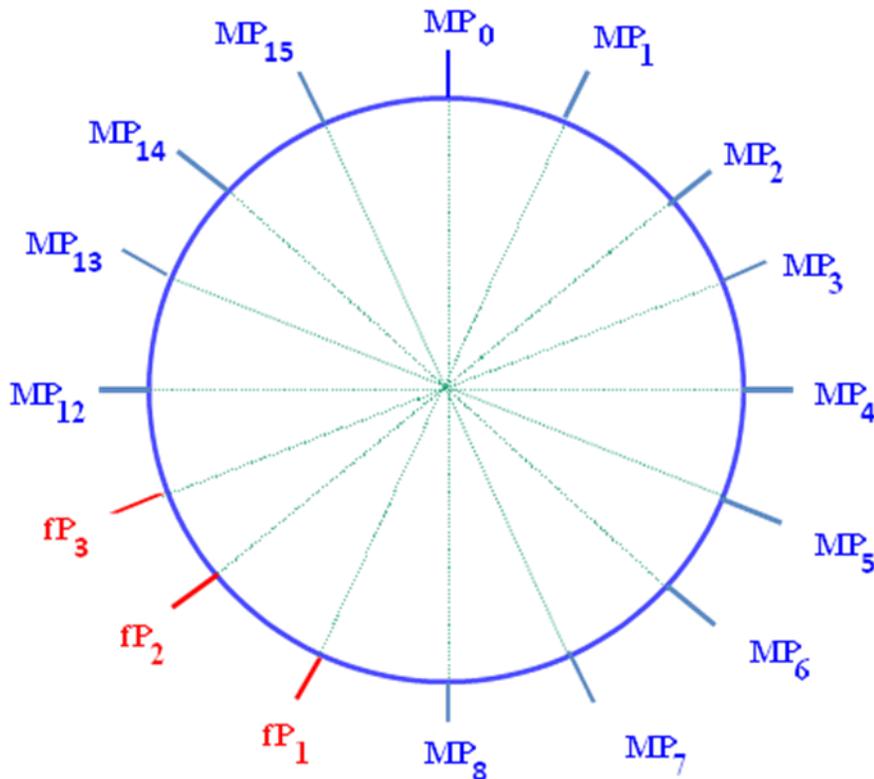


Figure 5.3-2: Macro- and Femto-cell Pilot Phases – Partition Approach

This approach is similar to the one described in Section 5.3.1.1, in the sense that a dedicated set of pilots across the network is used for femtocell phases. Some macrocell PN Offsets may need re-programming, with Neighbor List repercussions, but the PN Offset spacing need not be re-evaluated, since PILOT_INC is same as before re-planning. However, a disadvantage is that, in addition to macro re-programming, expansion of PN Offset space for more dense femtocells in later years may be limited. On balance, both of these approaches lend themselves equally well to Self-Organizing Networks (SON) implementation of PN Offset planning.

The last alternative for PN Offset planning is to allocate PN Offsets in an ad-hoc fashion. Within the coverage area of each macrocell a different set of PN Offsets for femtocells is used. None of the PN Offsets in a given macrocell's Neighbor List can be used for femtocells, since this can create ambiguity in the searcher. A complication with this approach is, since macrocell coverage overlaps with coverage of its neighbor cells, the neighbor list adjustment would have to be carefully managed. This is laborious and prone to errors. When choosing this approach, operator is advised to be very careful in the network planning, especially if the need arises to deploy new macro- or micro-/pico-cells. One particular area of concern expressed by some operators is the physical limitation in the Neighbor List Message. Some existing macrocell deployments have very few spaces in the NLM for expansion required for femtocells. Since in this planning approach, macrocells on cell boundary should include in their NL both femtocells

1 within macrocell X and its neighbor Y, Z, this can result in NL exhaust.
 2 Finally, femtocell deployment PN Offset planning decisions may be more
 3 complex to implement in a SON environment.

4 An example of PN Offset planning and neighbor list configurations is shown
 5 in Table 5.34-1 for the two recommended approaches: PILOT_INC and
 6 Partition.

7 Table 5.3-1: Pilot PN Offset Planning Examples

Parameter	Start Cell Config.	End Config. for PILOT_INC Approach	End Config. for Partition Approach
PILOT_INC	4	2	4
Own PN Offset	504	504	132
Ngbr 1 Offset	8	8	8
Ngbr 2 Offset	68	68	68
Ngbr 3 Offset	84	84	84
Ngbr 4 Offset	184	184	184
Ngbr 5 Offset	336	336	336
Ngbr 6 Offset	356	356	356
Ngbr 7 Offset	372	372	372
Ngbr 8 Offset	448	448	448
Ngbr 9 Offset	476	476	476
Femto Ngbrs	None	2,6,10,14,18	492, 496, 500, 504, 508
Ngbrs of BS	504 is in NL	Add Femto Ngbrs to NL	(1) Change 504 to 132 in each of the 9 NLM; (2) Add Femto Ngbrs to NL

8 Note that Pilot PN Sequence Offset Index is expressed in units of 64 PN
 9 chips, per C.S0005 [6], so that for example, for PILOT_INC of 4 it takes on
 10 values from 0 to 508 in increments of 4.

11

12 5.3.1.3 Neighbor List Configuration for FAMs

13 Long term, density of femtocells can be very high. For example, in a
 14 corporate campus environment, the femtocells can form a dense grid of
 15 coverage, requiring careful PN offset reuse, similar to the patterns seen on
 16 macro systems. Furthermore, femtocells can be not only horizontally
 17 spaced, but also vertically in floors of multi-storey buildings. The
 18 conclusion is that long term, there should be as many femtocell PN Offsets
 19 available as macro PN offsets.

20 The PN offset planning in support of legacy MSs outlined in the preceding
 21 section points a way to PN offset planning in denser femtocell deployments,
 22 which will be supported with the introduction of FAMs. The operator has to

1 simply extend the pilot phases from the 5 in our example in support of
2 legacy MSs, to the entire set of 128 shown in the first example discussed in
3 the above section. This entire set cannot fit into the NLM, so other means of
4 conveying the neighbor list are outlined in the standards, by introducing the
5 Access Point Pilot Information Message (APPIM). This new message is
6 introduced in C.S0005-E [23].

8 **5.3.1.4 Transition Issues from Legacy to FAM Support**

9 Reference to figure 5.1-1 may be helpful for the discussion in this section.

10 Pre-seeding the network with FAMs can help pave the way to smoother
11 transition to a more comprehensive PN Offset planning stage (Network State
12 2 and less limited femtocell PN Offsets) by the operator. New MSs placed
13 into service, whether they are activated for femtocell support or not, can be
14 FAMs. In addition to supporting APPIM, FAMs support other features, for
15 example autonomous femtocell discovery (see Section 5.2.4).

16 Pre-seeding with FAMs can occur even before initial femtocell deployment for
17 legacy MSs only. When the operator decides to transition to support the
18 femtocell system with MS femto-awareness, it can expand and use the
19 additional PN phase space (e.g., from 5 to 128), with immediate benefit of
20 these seeded MSs being able to use the femtocells with the additional 123
21 PN offsets. Assignment of the PN Offsets to a femtocell upon this expansion
22 should be in accordance with the following rules:

- 23 • If new femtocell activation is in a household with at least one MS that
24 is not femto-aware, the PN offsets chosen for the femtocell should be
25 from the initial pool of 5 (explicitly listed in the NLM).
- 26 • If all MSs in a household are femto-aware, the PN offset for new
27 femtocell activation can be from the expanded portion of newly
28 available 123 PN offsets.
- 29 • If an already activated femtocell is in a household with all MSs being
30 femto-aware, this femtocell may be re-configured to use a newly
31 expanded pool of 123 PN offsets.

32 This strategy, and in particular the last two points, warrant some
33 discussion.

34 The expansion from the assignment of 5 initial PN offsets to the additional
35 PN offset pool of 123 phases, or re-configuration to take advantage of these
36 additional PN offsets can start immediately upon introduction of APPIM.
37 However, the expansion to additional PN Offsets should be deferred to the
38 maximum extent possible. The expansion should occur when femtocell
39 density in the vicinity of the subject femtocell warrants additional PN offsets.
40 To understand this, let us take a case of a PN offset being assigned from the
41 expanded pool of 123, i.e., not appearing in the NLM on the macro system.
42 FAMs, most importantly those owned by the household members where the
43 femtocell is located, will have no problem using it. However, if a visitor
44 using legacy MS should enter the coverage area of the femtocell, there may
45 be some impact to such a MS, along the following lines.

1 Consider first the impact in idle state. In each slotted cycle wake time, the
2 MS takes a sample of the CDMA signal during its assigned paging slot, and
3 evaluates E_C/I_0 of the pilots from its neighbor list, in addition to the pilot of
4 the macrocell whose paging channel is currently monitored by the MS.
5 Normally, a MS would perform idle handoff when another pilot's E_C/I_0
6 exceeds the currently monitored paging channel pilot by 3 dB (typically).
7 However, since the femtocell pilot is not listed in the NLM, no idle handoff
8 will take place when a MS is at a location which otherwise would trigger idle
9 handoff. Instead, the monitored paging channel pilot E_C/I_0 will deteriorate,
10 while still being the strongest. This will remain so until the interference
11 from the femtocell is so high that the monitored pilot E_C/I_0 drops below a
12 threshold causing the MS to enter system determination sub-state. The MS
13 will conduct a systematic search of pilots, without regards to the neighbor
14 list. The MS will find the femtocell pilot, and will be able to use it, subject to
15 access control rules. More discussion on access control is in Section 5.6.

16 In summary, there may be a small disruption in service for the MS, resulting
17 in a very small probability of a missed page. However, the scenario of
18 visiting MS has a relatively low incidence rate, so the overall impact is small.

19 Let us now consider the impact of the PN offset expansion on legacy MSs in
20 the active state. Referring to Fig. 5.2-3, if the MS on the macro system is on
21 frequency F8 approaching a femtocell with PN offset that is not in the NLM
22 (this is the same case of e.g., a visitor we discussed in idle state case), as MS
23 gets closer to the femtocell, it will experience ever increasing level of
24 interference. Since the femtocell pilot is not in the neighbor list, there will
25 not be a trigger for handoff; it will merely affect interference level. Forward
26 link power will increase to cope with this increased interference, and
27 depending on the macro/femto geometry (interference ratios), the system
28 may not be able to overcome it (e.g., forward link power level may max out).
29 The call may drop as a result.

30 The above discussion illustrates the benefit of delaying the expansion to
31 additional 123 PN offsets for femtocells. With time, the ratio of femto-aware
32 to legacy MSs in the system improves (see Figure 5.1-1), thus lessening the
33 impact on the system. The timing of re-configuration should consider two
34 major factors:

- 35 (1) Femtocell density in the locality
- 36 (2) Nature of femtocell, i.e., public one (such as in a café) vs. home
37 installed one – the former should be kept within the initial pool of 5
38 PN offsets for an extended period of time, since likelihood of legacy
39 visiting MSs is higher.

40 It is worth noting that reprogramming of PN offsets can be automatic
41 without one-by-one intervention by the operator.

42 If MS is in active state on one of the frequencies other than F8, the situation
43 will be similar, except that increased interference will occur only when the
44 hopping pilot lands on the frequency the MS is using. There may be a
45 temporary signal loss, or some speech frames may be lost, however, it is
46 unlikely that call will drop, since in all but the most extreme cases power

1 control will quickly restore frame loss rate to acceptable level. Still, user
2 impact may be noticeable. In this case, the fewer the number of carriers,
3 the more pronounced the user impact. There will be some negative system
4 performance impact as well. The beacons transmitted on macro frequencies
5 do add to the interference in the system as a whole. This is discussed in
6 more detail in Section 5.2.3.

7 Once again, this scenario illustrates the point regarding advantages of
8 deferring expansion of PN offsets beyond the NLM. The same selective
9 migration strategy outlined above applies here as well.

11 **5.3.2 Femtocell Configuration and Provisioning**

12 **5.3.2.1 General**

13 In general, deployment of a FAP is different from a macro base station
14 deployment in the following aspects:

- 15 • *User-installed:* A FAP may be installed by a customer who may not
16 have special training or technical knowledge, including antenna
17 placement and system configuration.
- 18 • *Unplanned deployment:* Unlike macro base stations, FAPs are
19 typically deployed without a priori network planning; no special
20 consideration is given to traffic demand or interference with other
21 cells.

22 While network planning for coverage, capacity, and RF interference
23 management is a key aspect of pre-deployment optimization for macrocells,
24 it is not economical to extend the traditional methods of network planning to
25 femtocells.

26 Given the expected scale of femtocell deployments, automatic configuration
27 of femtocells is a critical function for improving coverage and capacity of the
28 network while mitigating interference with the macrocell network, as well as
29 between neighboring femtocells. Automated fault and performance
30 management of femtocells is also required for efficient network management.

31 To overcome the challenges of configuration, performance, and fault
32 management, Broadband Forum's TR-196/TR-262 [16] device management
33 framework has been adopted for cdma2000 femtocell networks, originally
34 conceived in Broadband Forum for management of broadband devices. This
35 has resulted in Broadband Forum extending the scope of the device data
36 model to support femtocells. The data model is contained in an amendment
37 to Broadband Forum TR-196/TR-262 [16] specification. The FAP
38 configuration data model is maintained in the femtocell and the FMS, and
39 data elements are exchanged using TR-196/TR-262 [16] protocol. They
40 allow for automatically configuring a FAP, as well as for fault notification,
41 periodic performance reporting, and FAP firmware management.

42 Interference management issues and solutions highlighted in Section 5.4 are
43 a critical aspect of FAP configuration, requiring proper choice of radio
44 parameters for the FAP. The femtocell data model allows the FAP to

1 communicate the downlink radio environment of the neighboring macrocells
 2 as well as femtocells to the FMS to aid in the selection of femtocell
 3 configuration parameters such as neighbor list configuration. This helps
 4 ensure good network performance despite deployment without manual
 5 network planning. The data model also allows the FAP to perform local
 6 optimization on some parameters (e.g., maximum transmit power) based on
 7 the range suggested by the FMS.

8 As part of the initial configuration, location of the FAP is determined by the
 9 femtocell system for compliance with legal requirements (spectrum license
 10 boundary), emergency call support and location-based services. This can be
 11 done based on system operator policy via one or a combination of the
 12 following methods:

- 13 (i) (A-)GPS;
- 14 (ii) Radio environment measurement;
- 15 (iii) IP address lookup (broadband access termination point address);
- 16 (iv) Database lookup of street address where the FAP is installed

17 The subject of FAP configuration and provisioning is very broad and
 18 complex. All FAP configuration parameters are listed in X.R0063 [14], which
 19 feeds into the aforementioned TR-196/TR-262 [16] data model. These
 20 documents should be consulted for more comprehensive study of the
 21 subject. The remainder of this section covers some of the critical items of
 22 FAP configuration and provisioning, outlining methodologies used by the
 23 FAP itself, or in conjunction with the FMS, to configure them in an
 24 optimized fashion, resulting in smooth operation of the femtocell and
 25 macrocell networks.

26

27 **5.3.2.2 Timing and Synchronization**

28 This section discusses options for synchronization of femtocell with the
 29 macrocellular system.

30 As do the macrocells, the femtocells maintain synchronization with the
 31 macrocellular system. C.S0010 [10] stipulates the recommended
 32 synchronization error limit of 3 μ s, and in the worst case (hard limit) of 10
 33 μ s. This level of synchronization is important for the proper functioning of
 34 the system. The principal approach in achieving it in the macro system is
 35 by way of GPS. That approach is certainly available for the femtocells as
 36 well. However, macrocell location is typically prominent (i.e., open to
 37 satellite reception). In rare situations when that is not the case, an
 38 extended GPS antenna and cable are comparatively simple to equip without
 39 adding too much complexity to the process of installing the base station. In
 40 contrast, the femtocell are expected to work when installed indoors by a
 41 consumer with minimal technical expertise, possibly inside a cellar or at low
 42 floors of a high-rise building, where satellite reception may be insufficient.

43 Methods of FAP synchronization other than GPS-based ones may be
 44 desirable to be supported for maximum flexibility in configuration and
 45 operation. One possibility is to synchronize the femtocell off the macrocell
 46 covering the territory. This is conceptually simple: Femtocell is equipped

1 with elements of the forward link receiver, that acquires the transmit signal
2 from the macrocellular base station, which then is used for synchronization.

3 A comparative evaluation of this method relative to GPS is provided in Table
4 5.3-2.

5 Table 5.3-2: Evaluation of Synchronization Techniques

Function	GPS Receiver	(Macro) FWD Link Receiver
Installation	Restrictive physical placement, may need GPS antenna, cable extension	Potentially less restrictive placement, (basement, low floors)
Geo-Location	Accurate, self-contained	Less accurate; Has dependency on core network support
Femtocell Configuration Assistance	Little or none, beyond geo location.	Can help configure femtocell neighbor list (macrocell and femtocell), assist in PN offset setting, geo location, femtocell transmit power, etc.

6 It should be pointed out that the objective of the evaluation in the table is
7 not to steer product development; rather the main objective is to say that
8 there are several alternatives, each of which has advantages in certain
9 deployment situations. Configuration assistance is an important additional
10 function of the forward link receiver in the FAP, which is further discussed
11 in Sections 5.3.2.5 and 5.3.2.6. In other words, synchronization is not the
12 only reason for including the forward link receiver in the FAP. Furthermore,
13 full MS modem functionality is not needed for this forward link receiver.
14 What is required is reduced functionality of a forward link demodulator,
15 amounting to the ability to decode the pilot and sync channel, no traffic
16 channel, or message exchange (layer 3) support with the macro is necessary.
17 Also, there is no reverse link transmission baseband processing that is
18 necessary. Hence, the synchronization function should not be thought of as
19 a feature of significant impact on the femtocell hardware and software
20 complexity.

21 Synchronization off the macro system can be helpful when GPS visibility is
22 low, assuming macro system reception is better. But even if the femtocell is
23 placed in a location with low macro system signal penetration, this type of
24 synchronization is feasible. This is because FAP antenna has higher gain
25 relative to a MS station antenna, which additionally can be configured, with
26 relatively small added complexity, as steerable directional antenna, as a FAP
27 design option.

28 Synchronization off the macrocellular system is conceptually a simple
29 solution: The forward link receiver in the FAP tunes to a nearby macrocell,
30 and derives the clock from it. Since the FAP also transmits on the forward
31 link in the same band, the signal transmitted by the FAP can cause
32 adjacent-band interference to the signal received from the macro BS.
33 Maximum possible separation of the macro frequency used for
34 synchronization is advised. Also, interference cancellation (IC) techniques

1 can be very effective in this situation, since the FAP transmit signal is
2 known to the FAP and can be subtracted from the received signal.

3 When using synchronization off the macrocellular system, excessive signal
4 propagation delay error from the macro BS to the FAP needs to be
5 compensated.

6 Femtocell timing can be adjusted based on the knowledge of FAP location
7 (see Section 5.3.2.3 on methods for determining FAP location). Note that it
8 of no importance how the FAP location is obtained, it could be by way of
9 address database lookup, triangulation, or other means. The identity and
10 location(s) of one or more of the neighbor base stations is also known by the
11 system (also immaterial how it is acquired).

12 There are other ways for the femtocell to obtain synchronization, but the
13 methods described are likely to be most common, allowing a great deal of
14 flexibility in FAP installation options and situations.

15

16 **5.3.2.3 Location**

17 **5.3.2.3.1 General**

18 This section discusses methods for determining FAP location for some of the
19 following purposes:

- 20 • Allowing activation (radio transmissison) in the licensed territory;
- 21 • Network radio planning and control
- 22 • Emergency calling

23 FAP can use a variety of techniques for determining its location. It can use
24 GPS. If GPS signal is too low in the FAP installation locality, the femtocell
25 system can determine FAP's location from the macrocellular system using
26 triangulation techniques.

27 In principle, if a FAP is equipped with a GPS receiver or CDMA forward link
28 receiver, any of the techniques used by the MS are possible. The
29 performance (e.g., accuracy, speed of location determination) should exceed
30 MS's location determination performance. This is due to a variety of factors:

- 31 • GPS receiver in the FAP is likely to have better antenna configuration;
- 32 • FAP is in a fixed location;
- 33 • If location using forward link triangulation is used, FAP can spend
34 much time searching for pilots of neighboring macrocells, and
35 integrating CDMA signals from very weak pilots;
- 36 • Battery limitation is not an issue in a FAP;
- 37 • FAP antenna configuration typically has higher gain compared with
38 MS, and is more likely to have receiver diversity, and/or be steerable.

39 Note that location determination is not the only reason to equip a FAP with
40 an advanced antenna configuration; other benefit are discussed in detail
41 elsewhere, and include improved interference reduction.

5.3.2.3.2 Forward Link Traingulation Techniques

The technique can be briefly described as follows:

- FAP tunes on a macro frequency known to contain only macrocells.
- FAP detects the CDMA system and synchronizes itself with the strongest pilot.
- FAP comprehensively searches for pilots it can detect, down to a very low E_c/I_0 . Thus, the FAP can typically detect a large number of pilots, even though with very low E_c/I_0 .
- FAP collaborates with the OAM&P system using triangulation technique to determine its location.

FAP reports to the OAM&P system pilot PN Offsets it detected and their relative timing (offset from the nearest and typically strongest pilot). FAP also reports E_c/I_0 of each of the pilots detected. The contents of this report are very similar to the contents of the Pilot Strength Measurement Message on the radio interface reverse link (see C.S0005 [6] Section 2.7.2.3.2.5), but the information can be of higher accuracy, and with increased timing resolution (FAP can use baseband over-sampling to achieve that).

OAM&P system knows geographic location (LAT/LON) of the macrocells in the report from the FAP, and performs triangulation to determine the location of the FAP, which it can send to the FAP.

GPS signal strength is likely to be low in dense urban environments (e.g., urban canyons or indoors in low stories of high-rise apartment buildings), where on the other hand CDMA coverage is likely to be present, and macrocell density high. Hence, this technique of location determination is useful when it's most needed.

5.3.2.3.3 Other Techniques

An alternative approach is LAT/LON lookup from the address (point of termination of fixed broadband connection), from a database which may be accessible to the wireless network operator, whether it's the same as the broadband network operator or not. Note that databases of this kind may not yet be available in some countries.

Multiple methods of location determination can be used as check of consistency, hence more robust, and adding to the system security, e.g., it can be used to detect any attempts of misrepresenting the actual location of the FAP.

5.3.2.4 Femtocell PN Offset Planning

Section 5.3.1.2 elaborates on PN Offset planning options for the cdma2000 system as a whole. This section contains a brief discussion of how PN Offset is chosen to be assigned to a newly installed FAP. The underlying

1 assumption is that one of two PN Offset planning approaches is used:
2 PILOT_INC approach illustrated in Figure 5.3-1, or Partition Approach
3 illustrated in Figure 5.3-2. The Ad-Hoc FAP PN Offset allocation is not
4 elaborated.

5 For the legacy MS support, there is no material difference between the
6 PILOT_INC and the Partition approaches, when it comes to FAP PN Offset
7 assignment methodology. For the longer term, if denser femtocell placement
8 is required, the approaches diverge. One of the key requirements in PN
9 Offset planning is to ensure that the plan is stable, i.e., once assigned, FAP
10 PN Offset should not be changed. Re-planning, especially if it also involves
11 macrocell re-planning, can result in significant complexity and is prone to
12 errors. Hence long term planning is critical. Therefore, operator should very
13 carefully study the choices available, as outlined in Sections 5.3.1.1 and
14 5.3.1.2.

15 In the initial phases of femtocell deployment (see section 5.1), a newly
16 deployed FAP will likely have to support legacy MSs (e.g., at least one of the
17 MSs in a household is not a FAM). The system will have a limited number of
18 PN Offsets, explicitly listed in the macro neighbor lists, one of which will be
19 assigned to a new FAP. Assuming the FAP has forward link measurement
20 capability, the FAP PN assignment process can be outlined as follows:

- 21 • FAP performs system acquisition (detects a neighboring macrocell or
22 femtocell) and takes comprehensive forward link measurements of all
23 visible pilots E_c/I_0 . Note that FAP can take detailed searches and
24 measurements of low value of E_c/I_0 , since it is not time- or power-
25 constrained, as is the case for a MS.
- 26 • FAP typically has a much better antenna than an MS. Hence FAP can
27 have rather good visibility of its surroundings of both the macro
28 system, as well as any femtocells nearby.
- 29 • FAP reports its findings to the FMS, i.e., provides a detailed list of the
30 PN Offsets and pilot strength measurements, possibly also BS IDs
31 that it can detect.
- 32 • Based on the FAP findings, and the pool of PN Offsets reserved for
33 femtocell usage, the FMS selects a specific PN Offset and commands
34 the FAP to use it. Alternatively, FMS can provide a set of choices,
35 from which the FAP selects one and report back to the FMS on its
36 selection.

37 Though the FAP can make good measurements and detect weak femtocells
38 at some distance away, it is important to give the FMS the final say as to
39 which PN Offset is selected. This is because a neighboring femtocell may be
40 temporarily turned off at the time measurements are taken, possibly leading
41 to a bad autonomous selection by the FAP. FMS on the other hand has
42 information about the FAP configurations in the vicinity. FMS can apply a
43 selection algorithm that identifies which PN Offset from the available pool is
44 reused in the FAP that is furthest away from the location of the FAP being
45 activated. Such selection is then confirmed or modified, as appropriate, by
46 the FAP's measurements discussed above.

1 If the FAP that is being activated has no forward link measurement
2 capability, then there is little choice but to have FMS assign the PN Offset
3 value based on its knowledge of the surrounding femtocells.

4 This relatively simple algorithm will ensure correct PN Offset selection until
5 such time that the pool becomes too small for the given density of
6 femtocells. At that point, the pool can be expanded. Due to practical
7 neighbor list size limitations in the macro system, this expansion often
8 hinges upon considerable population of FAMS in the system. FAMS don't
9 have to rely on the legacy neighbor list message for conveying cell searching
10 information.

11 Although it does not provide algorithmic details outlined above, BBF
12 specification TR-196 [16] contains all the necessary parameters required for
13 the PN assignment in accordance to the outlined procedure.

14 15 **5.3.2.5 FAP Transmit Power**

16 The discussion in this section is primarily pertinent for the macro/femto co-
17 channel deployment scenario, and to a degree, for dedicated RF carrier
18 scenario if the femtocell carrier is adjacent to a macro carrier. In the case of
19 dedicated RF carrier scenario where there is sufficient separation from the
20 macro RF carrier, so that adjacent channel energy leakage is negligible,
21 setting FAP transmit power is decided by the operator based on the femtocell
22 coverage (cell size) objective, and is usually a constant value, or a value
23 dependent only on the target environment (e.g., it may differ for dense urban
24 high-rise buildings from suburban or rural environment).

25 FAP transmit power level controls femtocell coverage footprint by balancing
26 the macrocell power level with femtocell power at the intended femtocell
27 coverage boundary. Proper setting of power level goes a long way to
28 controlling radio interference (see Section 5.4).

29 As in the case of FAP PN Offset (see Section 5.3.2.4), FAP and FMS can
30 collaborate to set FAP transmit power. Forward link measurement
31 capability by the FAP makes this process considerably more precise and
32 leads to better performance, while streamlining the procedure by allowing
33 the FAP to autonomously configure itself. The process is briefly outlined in
34 the following steps:

- 35 • FAP indicates to the FMS if it supports self-configuration of its
36 transmit power (in effect, this is an indication if FAP has forward link
37 measurement capability);
- 38 • If capable of such measurements, FAP may additionally provide
39 measurement(s) of received signal strength;
- 40 • If FAP is capable of self-configuration, FMS may provide a range of
41 transmit power values to be used by the FAP. FAP selects from the
42 range and reports its selection to the FMS.
- 43 • If FAP is not capable of self-configuration, the FMS determines the
44 transmit power selection for the FAP. To achieve proper coverage
45 balance, it is necessary to have map database, so that FMS can,

1 based on the location of the FAP, make the appropriate determination
2 of power setting.

3 FAP may adjust transmit power based on cell performance, once activated.
4 For example, frequent handoffs in and out of femtocell may indicate that
5 perhaps power is not balanced in the often-occupied area in and around the
6 household. In such a case, FAP may adjust transmit power upwards in an
7 attempt to reduce frequency of handoffs, while not violating the range limits
8 imposed by the FMS.

9 **5.3.2.6 Configuration of Other Radio Parameters in a Femtocell**

10 For a number of other radio parameters, FMS can generally set their values,
11 since many are system level parameters (e.g., contents of CDMA Channel
12 List message). For some of the parameters, FAP can provide assistance, or
13 set them autonomously, and merely report the setting to the FMS. In many
14 of such cases forward link measurement capability is helpful, as was
15 illustrated with PN Offset and FAP transmit power settings in the preceding
16 sections.

17 An example of such a parameter is neighbor list. If the FAP has forward link
18 measurement capability, it can determine the neighboring macro- and
19 femto- cells, and autonomously configure the neighbor list.

20 If on the other hand a FAP does not have such autonomous configuration
21 capability, the FMS sets the FAP's neighbor list. As in the case of transmit
22 power setting, the FMS relies on macro and femto coverage database for
23 such function, and includes in the list macro neighbors that have a rather
24 small chance of actually being neighbors to this FAP. Neighbor list
25 configuration may later be streamlined after FAP has been in operation for
26 some time, based on actual handoff statistics data.

27

28 **5.3.2.7 SeGW and FMS Discovery by FAP**

29 As amply illustrated in the preceding text, FMS works in conjunction with
30 the FAP to configure and activate it, even if the FAP is capable of self-
31 configuring many of the radio and other parameters required. Moreover,
32 before any user traffic is allowed on the network, and before the FAP is
33 allowed to access the FMS and other network resources, the FAP is
34 authenticated. In order to do so, the FAP discovers (learns the IP address of)
35 the Security Gateway (SeGW). X.S0059-100 [13] and S.S0132 [8] contain
36 detailed security procedures associated with FAP activation.

37

38

39 **5.3.3 Network Level Configuration and Provisioning**

40 In addition to radio parameters (Pilot PN Offset, Search Windows, etc.)
41 discussed in other sections of this document, System Parameters Message
42 (see C.S0005 [6]) contains network level parameters that need to be
43 configured for a FAP. This section discusses some of the critical parameters.

1 The SID/NID pair configuration can be used to cause MS to register when
2 moving between the macrocellular and femtocellular networks. Though
3 there are other ways to induce registration, this is the recommended system
4 configuration. For the parameter change registration to occur during idle
5 handoffs, at least one of the parameters in the SID/NID pair can be
6 configured differently for the FAPs than for the macrocells. Two approaches
7 for assigning SID/NID pairs to FAPs are outlined, both using the same SID
8 configuration for FAPs as the surrounding macrocellular system:

- 9 • Uniform NID Configuration: In this approach a single NID is
10 uniformly applied for all FAPs, but distinct from the macrocellular
11 NID. To account for the possibility of femtocell-to-femtocell handoff
12 (e.g., in enterprise environment), page escalation can be used to
13 surrounding FAPs, or blanket paging in zones of closely spaced
14 femtocells.
- 15 • NID Set Configuration: In this approach, a limited size set of NIDs
16 can be assigned to FAPs in a way that there is never a possibility of
17 femtocell-to-femtocell handoff between FAPs that use the same NID.
18 One particularly convenient approach is to select a set that mirrors
19 one-to-one the Pilot PN Offsets reserved for FAPs (see Section 5.3.1.2

20 Setting of most other non-radio parameters should be consistent with such
21 settings for the macrocellular system.

22 Settings of RF parameters such as handoff thresholds should be carefully
23 analyzed by the operator, and may be different than such settings on the
24 macrocells.

25

26 **5.4 Interference Management**

27 Key benefits of femtocells can be outlined as:

- 28 • Excellent user experience (through better coverage for voice and higher
29 data throughput);
- 30 • Offloading traffic from macrocellular network;
- 31 • Reduction of infrastructure deployment efforts.

32 To achieve these benefits, femtocell deployment is accompanied by a set of
33 solutions to mitigate RF interference issues, including:


- 34 • Dealing with restricted access (see Section 5.5.1) (i.e., femtocells restrict
35 usage to a set of MSs);
- 36 • RF deployment planning involving uncoordinated placement of FAPs,
37 with each user independently deciding in which exact location to install a
38 FAP;
- 39 • Low isolation between different coverage areas (e.g., femto/macro
40 isolation, in case of a FAP installed near a window).

41 Potential RF interference issues related to femtocell deployments are
42 outlined in the following.

1 **5.4.1 Interference between Macro- and Femto-cell**

2 Femtocells can cause interference both on the reverse link (RL) and forward
 3 link (FL) of the macrocells. For example, as illustrated in Figure 5-1, a FAP
 4 installed near a window of a residence can cause FL interference to a user
 5 served by a macrocell outside the house (a user not served by the FAP). On
 6 the RL, a user served by a FAP can cause interference to a user served by a
 7 macrocell if it is allowed to transmit at a very high power level. Similarly, a
 8 user served by a macrocell that is being power-controlled by a distant
 9 macrocell can create significant rise-over-thermal (RoT) at the FAP receiver,
 10 when in its vicinity.

11

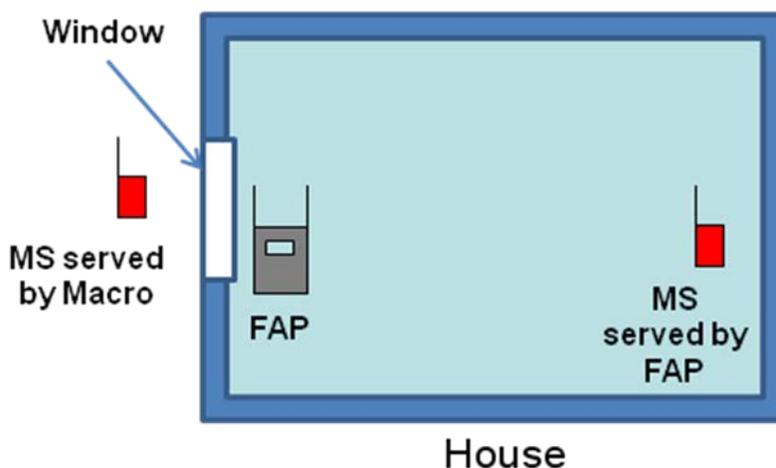

12

13 Figure 5.5-1: Femtocell and a closely located macro MS

14

15 **5.4.2 Inter-Femto Interference**

16 Femtocells can also create interference to each other due to uncoordinated
 17 deployment (each femtocell placement in a residence or business premise is
 18 individually decided by the installer). For example, in a multi resident
 19 apartment, a FAP installed near a wall separating two residences can cause
 20 significant interference to a neighboring residence. In such a case, the
 21 strongest femtocell for a home MS (in terms of RF signal strength) may not
 22 necessarily be the serving femtocell if access is restricted (see section 5.5).
 23 Such a scenario is shown in Figure 5.4-2 where FAP 1 is causing significant
 24 FL interference to MS2 served by FAP 2 due to low Signal-to-Noise Ratio
 25 (SNR). On the RL, MS2 served by FAP 2 is resulting in significant
 26 interference (high RoT) at FAP 1.

27

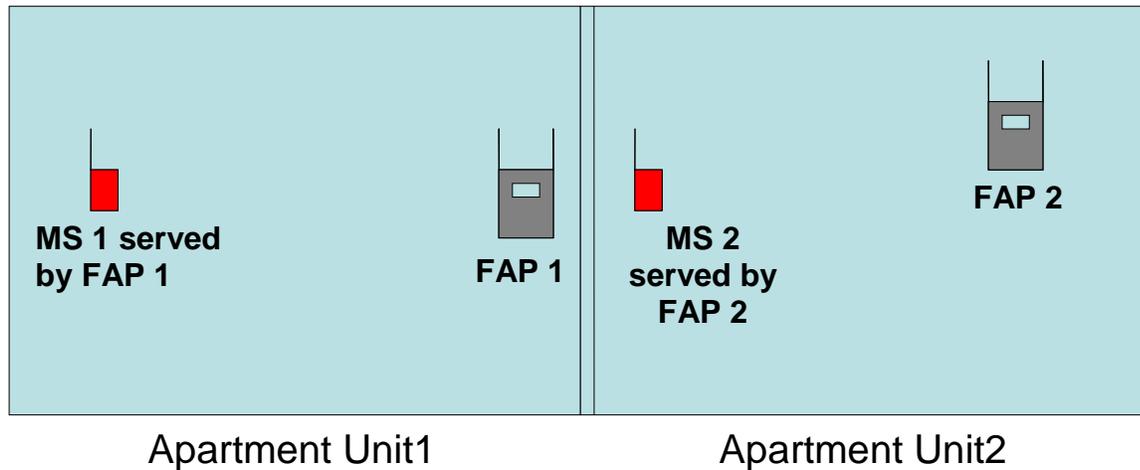


Figure 5.4-2: Inter-femto Interference Scenarios

As evident from the above examples, serious RF interference issues may arise unless appropriate methods are utilized to mitigate them. However, with proper interference management techniques, high quality user experience can be achieved with femtocells with minimal impact on the macro network performance.

As femtocells create desired coverage in the home/enterprise area, coverage holes may be created around the region for MSs that are not served by that femtocell. Thus transmit power of each femtocell needs to be adjusted carefully depending on the particular femtocell location within a macrocell (e.g., cell edge vs. close to macrocell site) and deployment scenario (suburban vs. urban).

If the macrocell signal is strong in the vicinity of the femtocell, the femtocell would need to transmit at relatively higher transmit power level in order to be able to provide coverage for a desired area without impacting the macro users nearby. On the other hand, if the macrocell signal strength is already low, nearby macro users cannot tolerate large interference, therefore the femtocell power needs to be chosen more conservatively.

Support of active state hand-in (see Section 5.7) reduces interference to an MS that is on a call approaching a femtocell, by allowing the call to be handed in to the femtocell, in case of open access or for authorized MS for that FAP.

If active hand-in is not supported, this reduction of interference cannot be achieved even for the case of open access. If active hand-in is not supported, an active user has to continue to be served by the macrocell. Any transmission from the femtocell on the same macro carrier would result in interference to that user. Additionally, the active user transmission would impact the noise floor of the femtocell, affecting the FAP reverse link performance. If beacon transmissions are utilized to enable discovery of femtocells, proper power calibration of the beacon becomes crucial, since

1 beacon is transmitted on the macro carrier. Any possible leakage from the
2 femtocell to adjacent macro carriers also needs to be factored in while
3 setting the transmit power levels.

4 The transmit power settings can be determined via a centralized power
5 calibration algorithm, or by an autonomous self calibration scheme where
6 FAP takes into account FL measurements of the macrocell and nearby
7 femtocell signal strength to calculate the required transmit power level in
8 order to achieve the desired coverage region with minimal impact on the
9 macro network. Even in the presence of RL interference due to nearby users
10 on a macrocell or another femtocell, the femtocell users should still get
11 satisfactory RL performance, overcoming this interference. Measures should
12 be taken in an effort to limit the interference impact of femtocell users on
13 the macro network.

14

15 **5.4.3 Out-of-Band Interference**

16 As is the case with macrocells, femtocells' out-of-band emissions (OOBE)
17 may cause interference to adjacent band systems. Interference mitigation is
18 achieved through increasing the isolation between transmitter and victim
19 receiver. Factors contributing to isolation are: digital modulation roll off,
20 passive filtering, antenna gain discrimination, cable losses, environment
21 losses, and spatial separation. Operators have good success mitigating
22 macrocell adjacent band interference through use of RF filters, antenna
23 placement, and site collocation.

24 Femtocell deployment represents a different challenge in adjacent band
25 interference management compared to macrocells. Macrocell interference
26 mitigation techniques such as additional RF filtering and antenna placement
27 coordination do not apply to femtocells. Interference potential between
28 femtocell and macrocell in adjacent band is greatly reduced if adjacent band
29 macrocells are collocated. If interference does occur, flexibility in femtocells
30 channel assignment is the key to mitigating adjacent band interference. For
31 ease in troubleshooting, the operator can utilize data from the Fm interface
32 (FMS to femtocell), which provides the operator with the femtocell location,
33 and allows operator to control the femtocell channel assignment and/or
34 power level settings.

35

36 **5.5 Access Control**

37 **5.5.1 Types of Access**

38 The primary intent of use of a femtocell is for occupants of a household in a
39 home installation, or a business for enterprise installation. Some femtocells
40 may be installed in public places, such as coffee shops, with the purpose
41 similar to current use of Wi-Fi hot-spots in those situations, namely
42 allowing internet access as a convenience to coffee shop patrons. For the
43 case of femtocell, this is further enhanced by allowing these users both data
44 and voice services using their mobile phones.

1 As readily apparent, there is a variety of use cases for femtocells. As is the
2 case with home Wi-Fi installations, access can be restricted, or analogous to
3 Wi-Fi access when installed in public places, it may be open. (Note that this
4 addresses only the concept of access and not others such as authentication,
5 and usage accounting). These use cases may overlap, e.g., a home
6 installation may be open, so that guests in a household may use it. Hybrid
7 cases are also possible, e.g., a FAP may be open only to a select set of
8 subscribers, or may be specifically excluded to a set of cellular users.

9 A FAP can be configured to have one of the following types of access (refer
10 also to A.S0024 [1]).

- 11 • Open Access: A femtocell is open for any cellular subscriber to access
12 and use without restrictions.
- 13 • Restricted Access: A femtocell access is restricted to a user or a group of
14 users defined in the Access Control List (ACL).
- 15 • Signaling Association: This is a variant of Restricted Access, where use
16 of a femtocell is restricted to users in the ACL. Other users are allowed
17 to register on the femtocell, monitor the paging channel, and use the
18 access channel of the femtocell, but when traffic channel resources are
19 needed, the network assigns them on the overlaid macrocell system.

20 Note: Access Control is sometimes referred to as “Access Association”.

21 Note: Local IP Access (LIPA) refers to routing option for certain services that
22 bypasses Wireless Operator’s packet data core network, and is unrelated to
23 radio access. LIPA is discussed in Section 5.9.1.

24 Note that this division is somewhat loose and variants of each may be
25 exercised by the network, depending on the situation (e.g., an open access
26 FAP may be effectively temporarily turned into the signaling association FAP,
27 when traffic channel or broadband transmission resources are exhausted).

28

29 **5.5.2 Open Access**

30 As noted, open access works well when the intent is to provide easy access to
31 all network subscribers for both data and voice services. Since legacy MSs
32 were designed for open access macro networks, this form of femtocell access
33 is simplest to implement and deploy. If the intent is to limit services to a
34 select group (e.g., a specific customer set in an enterprise installation or
35 friends and family in a home installation), a signaling association or
36 restricted access should be considered. Also, the difference between these
37 two forms of limiting access should be weighed.

38 **5.5.3 Non-Open Forms of Access**

39 Where access is not completely open, femtocell access control (FAC) is
40 required. FAC support includes:

- 41 • Identification of access control enforcement point;
- 42 • ACL - the list of MS/ATs that are authorized to access services through
43 the FAP;

- 1 • Signaling between the ACL storage point and the enforcement point.
2 In cdma2000-1x or HRPD systems, when the Femtocell Management System
3 (FMS) is the ACL storage point, then the FAP acts as the enforcement point.
4 In HRPD systems, ACL may optionally be stored at the AN-AAA. The FAP
5 acts as the enforcement point through its interaction with the ACL storage
6 point, which binds the ACL with the FAP through Femtocell Equipment
7 Identifier (FEID).

8 **5.5.3.1 Restricted Access**

9 When an MS/AT registers with the FAP, the FAP verifies the MS/AT identity
10 (e.g., the IMSI) with the ACL. If the MS/AT is not in the ACL, for a restricted
11 access, the FAP does not accept the registration and may redirect the
12 MS/AT to a macro BS/AN. While this conserves resources in the FAP for
13 use by authorized MS/ATs for this femtocell, a rejected legacy MS/AT close
14 to the FAP on an active call may become a significant source of RF
15 interference to authorized users in that FAP. There may be other problems
16 directly affecting a restricted legacy MS/AT, such as re-attempting to access
17 the restricted FAP upon detection of a pilot beacon transmitted on the macro
18 RF carrier (system selection loop). For these reasons, signaling association
19 is preferred form of access relative to restricted access. More on this subject
20 can be found in the Interference Control Section 5.4.

21 **5.5.3.2 Signaling Association**

22 With Signaling Association, any MS/AT can access and register with the
23 FAP, i.e., the MS/AT is reachable/pageable via the FAP. However, a MS/AT
24 that is not in the ACL may be redirected to macro network when it attempts
25 to establish a traffic connection.

26 This way, a non-authorized user can camp on the FAP, receive pages and
27 control signaling, without consuming significant backhaul resources of the
28 FAP. When active, this user does not pose significant interference problems
29 to the authorized users, since it is assigned traffic channel resource on a
30 different frequency on the macro network. Upon exiting from the active
31 state on the macro network, the MS/AT may return to camp on the
32 femtocell.

33 Signaling Association solves a lot of problems associated with the Restricted
34 Access that are pointed out in section 5.5.3.1, particularly with legacy MSs.
35

5.6 Femtocell System Security Aspects

The Security Framework for Femtocell Systems is defined in S.S0132 [8]. The MS/AT uses the cdma2000 air interface to access services through a FAP using existing security mechanisms as defined in the published cdma2000-1x and HRPD specifications. The FAP uses a Security Gateway (SeGW) to securely connect to a cdma2000 operator's core network. The SeGW discovery procedures are defined in X.S0059-100 [13]. Since the IP network, including broadband connection between the FAP and the SeGW, is assumed to be untrusted, mutual authentication (FAP Device Authentication) is performed and secure tunnel(s) are established between the FAP and the SeGW before any traffic from the FAP is allowed into the cdma2000 core network.

5.6.1 FAP Device Authentication

The mutual authentication between the FAP and the SeGW is performed using IKEv2 (see RFC 4306 [24]) with certificates. The FAP certificate is pre-assigned to the FAP during manufacture using an operator trusted Certificate Authority (CA). This means that an operator allowing FAPs from a particular vendor, needs to add the vendor's FAP CA certificate to the list of CA certificates that SeGW uses to authenticate the FAP. Similarly, the SeGW is assigned a SeGW certificate by the operator using a FAP trusted CA (such as the operator's CA or a trusted 3rd party CA). This means that the FAP manufacturer needs to add the SeGW CA certificate to the list of trusted CA certificates that the FAP will trust to authenticate the SeGW.

Once the FAP device authentication is successful, one or more pairs of IPsec SAs are established to protect all traffic between the FAP and the cdma2000 core network.

In order to aid interoperability between the FAPs and the SeGW, the required profiles for FAP certificates, SeGW certificates, IKEv2, IPsec are also specified in S.S0132 [8]. The FAP device certificates are identified using the FAP Device Identity, called FAP Equipment Identifier (FEID).

5.6.2 FAP Device Identity

The FAP Equipment Identifier (FEID) is a globally unique identifier that uniquely identifies a FAP device. The FEID is either the 64-bit or 48-bit IEEE hardware address of the FAP and is represented in the EUI-64 (Extended Unique Identifier – 64) format. Administration of FEID assignment is performed autonomously by FAP manufacturers.

1 **5.6.3 FAP Secure Environment**

2 The highly security sensitive FAP credentials (e.g., private key of the FAP
3 certificate, trusted CA certificate store) and cryptographic operations that
4 make use of these credentials need to be isolated from unauthorized access
5 and/or modification from other software modules inside the FAP. This is
6 achieved by requiring a well-defined Secure Environment within the FAP, a
7 logically separate entity within the FAP that provides secure storage and
8 secure execution functionalities. The Secure Environment also supports the
9 secure start-up and other device integrity validation procedures in order to
10 ensure that the various components (e.g., software modules) needed for the
11 secure operation of the FAP have not been tampered with or otherwise
12 compromised.

13

14 **5.6.4 FMS Security**

15 The Femtocell Management System (FMS) is the management entity used to
16 manage the FAPs. If the FMS is inside the operator's core network, the FAP
17 communicates to the FMS via the SeGW. In this case, the traffic between
18 the FAP and the SeGW is protected using the IPsec tunnel. In addition, the
19 management traffic between the FAP and the FMS may be further protected
20 using TLS (Transport Layer Security).

21 In certain scenarios (e.g., the FAP is unable to connect to SeGW), the
22 operator may place an FMS on the public IP network (e.g., the Internet) for
23 diagnosis and initial configuration of the FAP. When the FMS is in the
24 public network domain (as opposed to the FMS in the protected network
25 domain and only reachable through the SeGW), it is critical to ensure that
26 the security measures are deployed in order to secure the FMS as well as the
27 traffic between the FAP and the FMS.

28 Managing a FAP using an FMS may often require transfer of files between
29 the FAP and a management server, such as those used for initial
30 configuration, or for updating the FAP software. When the FAP needs to
31 download a file, the FMS may either provide the file directly, or it may
32 provide a link to the actual file for download. In such circumstances, the file
33 transfer between the FAP and the FMS (or another server) and the related
34 commands on the file are protected using the Signed File Transfer
35 mechanism called the Signed Package Format.

36 The required profiles for FMS security and the Signed Package Format are
37 specified in S.S0132 [8].

38

39 **5.7 Mobility in Femtocell Systems**

40 Since both the user and the operator expect femtocell to provide the same
41 service experience as macrocell, it is critical for a connection to transition
42 seamlessly as the MS/AT moves in and out of femtocell coverage.

1 Due to limited coverage and, over time, high density of femtocells, an MS/AT
2 may quickly and frequently transition in and out of femtocell coverage. This
3 poses challenges for both idle and active state femtocell handoff.

4 There are many aspects of mobility, which are addressed in detail in the
5 relevant technical specifications. The intent here is to minimize repetition of
6 information in those specifications, but rather to provide a comprehensive
7 picture of the types of mobility supported in the current release of the
8 specifications, how mobility is supported with legacy MSs, and what
9 improvements can be anticipated with FAMs.

10 The section is organized as follows.

- 11 • Air Interface Style: cdma2000-1x procedures are described first,
12 followed by HRPD procedures;
- 13 • Connection State: Within each air interface style, idle (dormant)
14 connection state procedures are described first, followed by active
15 (connected) state procedures;
- 16 • Direction: Within each interface style and connection state, first the
17 direction of movement away from the FAP (i.e., hand-out) is
18 discussed, followed by movement toward the FAP (i.e., hand-in);
- 19 • Service Category: Within cdma2000-1x, voice services related
20 discussion is conducted first, followed by data services discussion, if
21 applicable (i.e., if there is any unique differentiation among the two);
- 22 • Handset Class: In each of the above cases, the initial discussion
23 focuses on procedures with legacy MSs. If any opportunities for
24 improvement using FAMs exist, this is pointed out at the end of the
25 discussion on a given subject.

26 **5.7.1 cdma2000-1x Procedures**

27 **5.7.1.1 Idle Handoff Procedures**

28 **5.7.1.1.1 Hand-Out**

29 Hand-out is a handoff from a femtocell to macro-cellular network. The idle
30 hand-out processing is identical to the legacy procedures for idle handoffs,
31 as described in details in C.S0001~0005 [2 ~ 6] set of air interface
32 specifications, briefly summarized herein.

33 The initial condition is:

- 34 • MS is in idle state
- 35 • MS is monitoring a FAP Paging Channel
- 36 • MS is registered on the femtocell system

37 For femto/macro co-channel deployment scenario, the FAP neighbor list
38 consists of one or more macrocell BS PN Offsets which are of significant
39 strength in the location at or around the FAP. In the idle state, in each
40 paging slot cycle, the MS evaluates pilots received from the BS for the
41 currently monitored Paging Channel, plus pilots in the Neighbor List of the
42 currently monitored BS (in this case the FAP). As the MS moves away from
43 the FAP, the received pilot E_c/I_0 of the FAP pilot weakens, hence the macro
44 BS pilot(s) relative strength increase(s). When the dominant macro BS pilot

1 E_c/I_0 becomes stronger (typically 3 dB) than the FAP pilot, the MS performs
 2 idle hand-out as follows:

- 3 • MS begins demodulating Paging Channel of the target macro BS
- 4 • MS receives System Parameters Message from the macro BS, which
 5 includes SID/NID pair for the macro system.
- 6 • Upon determining that the SID/NID pair is different from the stored
 7 SID/NID pair (for the femtocell system), MS registers on the macro
 8 system (see Section 5.3.4).

9 Note that a FAP may intentionally be configured without any pilots in its
 10 neighbor list. The operator can choose that configuration in order to
 11 effectively extend femtocell coverage. As the MS moves away from the FAP,
 12 if no neighbors are listed, it will remaining camping on the FAP until it can
 13 no longer decode the paging channel. This can be useful in the following
 14 cases:

- 15 1) To extend femtocell coverage for legacy MSs, whose hand-out
 16 hysteresis thresholds cannot be controlled by the FAP;
- 17 2) In dedicated carrier femtocell deployment scenario, which would
 18 otherwise require inter-frequency macro neighbor search; depending
 19 on MS design, this can result in battery standby time penalty, if the
 20 MS separately tunes to femtocell frequency for paging channel
 21 monitoring, and to macro frequency for neighbor searching;

22 With no macro pilots in the neighbor list, the MS camps on the FAP as long
 23 as link quality is good. When it can no longer decode the paging channel
 24 reliably, the MS will discover a macrocell via system (re)acquisition.

25 Hand-out for FAPs can be controlled by the FAP by means of handoff
 26 hysteresis values for both intra- and inter-frequency handoff in the Access
 27 Point Identification message (see C.S0005-E [23]).

28 **5.7.1.1.2 Hand-In**

29 Hand-in is a handoff from macrocellular network to a femtocell. Hand-in
 30 processing contains some unique issues compared to idle handoff between
 31 two BSs in macrocellular systems. The most significant issue is MS
 32 detection of having entered the FAP coverage area.

33

34 **5.7.1.1.2.1 Legacy MS Hand-In**

35 A MS in idle state on macrocellular system is hashed to one of multiple
 36 CDMA RF carriers comprising the deployed macrocellular system. If macro-
 37 femto co-channel RF plan is employed (see section 5.2.1), and the frequency
 38 the MS was hashed to happens to be the same frequency used by the FAP,
 39 then the idle hand-in procedures are identical to macrocellular BS-BS idle
 40 handoff (however, see the discussion on MS registration on the target FAP at
 41 the completion of idle hand-in). In all other cases (dedicated femtocell RF
 42 deployment, or MS hashed to a frequency other than the one used by the
 43 FAP), the legacy MS searcher in the idle state needs some sort of assistance

1 from the network in order to detect the presence of the femtocell, once
2 within its coverage. This can be accomplished, for example, with pilot
3 beacons (see Section 5.2.3.1).

4 The NLM broadcast by the currently monitored macro BS includes the Pilot
5 PN Offset of the FAP (see section 5.3.1). Hence, during the active part of the
6 slotted cycle, the MS will search, among others, the PN Offset of the pilot
7 used by the FAP. Even while camped on an RF carrier other than the one
8 used by the FAP, once in the target femtocell coverage area, when the
9 hopping pilot beacon transmits in that MS's paging slot, the MS will detect
10 the FAP's pilot. This detection may occur with some delay, a function of the
11 hopping beacon period and the exact timing of MS movement to the
12 femtocell coverage area. Once the MS is at a location where the beacon pilot
13 becomes dominant, the MS will initiate idle hand-in procedure to the FAP,
14 briefly outlined as follows:

- 15 • MS adjusts its system time to the hand-in target FAP beacon timing;
- 16 • MS demodulates Paging Channel of the FAP beacon;
- 17 • MS receives (Global) Service Redirection Message, and tunes to the
18 FAP frequency; starts monitoring main Paging Channel of the FAP;
- 19 • MS detects System Parameters Message from the FAP, which contains
20 the SID/NID pair for the femtocell system;
- 21 • Upon determining that the SID/NID pair is different from the stored
22 SID/NID pair (for the macro system), MS registers on the femtocell
23 system (see X.S0059-200 Section 5.1.1.2 on MS Registration)).

24 **5.7.1.1.2.2 FAM Hand-In**

26 A FAM equipped with a PUZL database (see section 5.2.4) can accelerate the
27 timing (reduce delay) of idle hand-in, i.e., not depend on the femtocell
28 beacon to trigger the hand-in procedure. When a FAM detects that it is in
29 the zone described in one of its PUZL entries, in addition to monitoring the
30 macro cellular RF carrier to which it is hashed, it can tune in and sample
31 the frequency on which the FAP is deployed. This frequency is one of the
32 Informational Elements (IEs) included in the PUZL database entry.

33 The FAP frequency sampling can occur, for example, in every paging cycle
34 (when within the PUZL target zone), making idle hand-in delay performance
35 exactly the same as that of macro idle state handoff. Subject to MS design,
36 if MS cannot perform multi-carrier sampling, and if idle state stand-by time
37 is a concern, the FAP frequency sampling can occur less frequently (e.g., at
38 several multiples of the paging cycle time).

39 FAM can use this improved-performance hand-in trigger, and can also skip
40 the steps associated with pilot beacon from the hand-in procedure outlined
41 in Section 5.7.1.1.2.1, whenever handing in to a FAP that it is in its PUZL
42 database. Since frequently visited FAPs will be in the PUZL, this can for all
43 practical purposes occur in a very large percentage of hand-in cases, while
44 for the remainder the beacon based approach outlined in 5.7.1.1.2.1 can
45 continue to be used.

46 For the PUZL-based idle state hand-in, the procedure is simplified to these
47 steps:

- 1 • FAM tunes to the FAP frequency, takes samples, and evaluates pilots;
- 2 • Upon detection of a dominant pilot from a FAP that is in its PUZL,
- 3 FAM adjusts its system time to the FAP timing;
- 4 • FAM demodulates System Parameters Message from the FAP, which
- 5 contains the SID/NID pair for the femtocell system; This should
- 6 match the SID/NID pair recorded in the FAM's PUZL for this FAP;
- 7 • Since the SID/NID pair is different from the stored SID/NID pair (for
- 8 the macro system), FAM registers on the femtocell system.

9 After the MS registers with the FAP, it is preferable for the MS to stay on the
 10 FAP and not hand off back and forth to and from the macro base station
 11 until the MS definitely moves away from the FAP. This reduction of ping-
 12 pong effects is accomplished for FAMs by means of handoff hysteresis values
 13 for both intra- and inter-frequency handoff in the Access Point Identification
 14 message (see C.S0005-E [23]).

15 **5.7.1.2 Active State Handoff Procedures**

16 **5.7.1.2.1 Hand-Out**

17 From the air interface perspective, Active State Hand-Out from a FAP to a
 18 macrocell is identical to the handoff procedures on the macrocellular
 19 system. From the network perspective, a good analogy for active state hand-
 20 out would be inter-MS hard handoff. This is because in the femto-to-
 21 macro hand-out, call control is moved from the FCS (which can be thought
 22 of as roughly equivalent to MSC for the femtocellular system) and a macro
 23 MSC. The details of the RAN/network procedures are provided in X.S0059-
 24 200 [13]. A brief summary follows.

25 The beginning state is a voice call between the MS, via the FAP and FCS to
 26 the PSTN or a macro network to the party on the far end.

27 The hand-out procedure depends on the deployment scenario, i.e.,
 28 femto/macro co-channel, or the dedicated femto carrier deployment.
 29 Initially, while the connection is on the FAP, the MS has a single pilot in the
 30 active state belonging to the FAP. For the case of femto-macro co-channel
 31 deployment, in the course of forward link demodulation, the MS measures
 32 E_c/I_0 of the active pilot plus neighbor pilots on the same carrier. When the
 33 MS detects that the pilot E_c/I_0 of one or more of the macrocells listed in the
 34 NLM exceeds the handoff threshold, the MS sends PSMM message to the
 35 femtocellular system, which may trigger a hand-out. The FAP can control
 36 the handoff thresholds (e.g., T_ADD, T_COMP parameters) by means of
 37 overhead messages.

38 For the dedicated carrier femtocell deployment scenario, the MS searches for
 39 macrocell pilots on another carrier (i.e., perform candidate frequency
 40 searches) while still maintaining the call on the femtocell carrier. To
 41 minimize tuning away to the other carrier, these searches can be requested
 42 by the FAP only when the MS reports certain events such as active cell (FAP)
 43 pilot E_c/I_0 below a threshold, or frame erasures exceeding a threshold. The
 44 MS can report such events through regular signaling messages such as

1 PSMM and Power Measurement Report Message (PMRM). The MS can be
2 directed to perform a single or periodic search of macrocell pilot(s) on one or
3 more macrocell carrier frequencies through Candidate Frequency Search
4 Request Message (CFSRQM) and Candidate Frequency Search Control
5 Message (CFSCNM). In response, the MS searches for macrocell pilot(s) and
6 reports their E_c/I_0 via Candidate Frequency Search Report Message
7 (CFSRPM). Based on the CFSRPM, the FAP may initiate hand-out to the
8 qualified macrocell(s) reported in the CFSRPM.

9 The remainder of the RAN and core network procedures is addressed in
10 detail in X.S0059-200 [13]. The FAP looks up the hand-out target
11 macrocell(s) from the <PN offset, ICGI (IS-41 Cell Global Identifier)> mapping
12 provisioned by the FMS. The FCS works with the target MSC to complete
13 the hand-out. From the macrocellular network perspective the procedure is
14 analogous to an inter-MSC handoff. The target frequency for the hand-out
15 may be any macro RF carrier deployed in the macro system, not necessarily
16 the macro/femto co-channel carrier, if that deployment scenario is used.

17 The end state is MS in a voice call via the target BS and the target MSC.

19 **5.7.1.2.2 Hand-In**

20 In addition to the issue of MS detection of having entered the FAP coverage
21 area elaborated in the idle hand-in case, the active state hand-in has one
22 more critical issue – resolution of ambiguity of the hand-in target FAP.

24 **5.7.1.2.2.1 Legacy MS Hand-In**

25 A MS in active state can be using any of the multiple CDMA RF carriers
26 comprising the deployed macrocellular system. If the macro-femto co-
27 channel RF plan is employed (see section 5.2.1), and the connection is on
28 the same frequency used by the FAP, then the detection of the FAP pilot and
29 trigger for hand-in is identical to the case of macrocellular BS-BS active
30 state handoff. In all other cases (dedicated femtocell RF deployment, or the
31 call is on a frequency other than the one used by the FAP), the legacy MS
32 searcher in the active state needs some sort of assistance from the network
33 in order to detect the presence of the femtocell, and report to the
34 macrocellular system to trigger hand-in.

35 As is the case with idle state procedures, this network assistance can be
36 accomplished, for example, with pilot beacons (see Section 5.7.1.1.2.1). The
37 NLM broadcast by the macro BS includes the Pilot PN Offset of the FAP, and
38 the MS will search it while in the active set. Once MS is in the femtocell
39 coverage area, when the hopping pilot beacon transmits in the RF carrier
40 frequency occupied by the MS in the active state, the MS will detect the
41 FAP's pilot. As explained for the case of idle procedures, this detection may
42 occur with some delay. Once the beacon pilot exceeds handoff threshold,
43 the MS will transmit PSMM, thus triggering hand-in.

44 Two cases are considered:

- 1 (1) Open Access FAP (see Section 5.5.2), or Restricted Access FAP, where
- 2 this MS is allowed to access the FAP
- 3 (2) Restricted Access for this MS/FAP pair, including Signaling
- 4 Association (see Section 5.5.3)

5 For the case (1), the network performs hand-in.

6 For the case (2), the network may perform hard handoff to a macrocell on a
7 different frequency, if the original frequency is the same one used by the
8 FAP. This would reduce interference of the call with the FAP on which the
9 MS is not allowed (see Section 5.4 on RF Interference Control). This can be
10 accomplished either by direct inter-frequency macrocellular handoff (this
11 option requires some changes in the macrocellular system to differentiate
12 open and restricted femtocell access), or by performing hand-in immediately
13 followed by hand-out to a different macro-frequency (hand-in/hand-out
14 sequence). If hopping beacon is used by the FAP, hand-in trigger may occur
15 again, if the call is still in progress during the next beacon cycle, and MS
16 remains the FAP coverage area. To prevent a handoff loop, the macro
17 network may ignore this repeated hand-in trigger, however this would likely
18 require a macrocellular system upgrade. The case (2) is not further
19 elaborated here.

20 The hand-in procedures for case (1), when hand-in is allowed, are described
21 in detail in X.S0059-200 [13] and A.S0024 [1], and are briefly outlined
22 herein.

23 The hand-in procedure is triggered when the MS sends a PSMM per
24 C.S0005 [6] to the macrocellular network. Based on the identity of the
25 strongest pilot in the PSMM (PN Offset given to a FAP), the MSC directs
26 handoff request to the FCS, hence to a FAP. The FCS cannot determine with
27 certainty which of the FAPs among multiple candidates using that PN Offset
28 is the hand-in target (because there are only up to 512 discrete PN Offset
29 values, which is insufficient to uniquely identify one of possibly tens or
30 hundreds of thousands of FAPs that may be under the control of a single
31 FCS). The FCS sends a measurement request message to all candidate FAPs
32 located in the vicinity of the source macrocell, which are assigned that PN
33 Offset. Each candidate FAP attempts to detect the MS by reverse link
34 measurements. Based on the results of the measurements or by
35 supplemental means not elaborated here, the target FCS can positively
36 identify the target FAP. The remainder of the procedure is similar to what
37 was already discussed for the case of hand-out (i.e., inter-system handoff).

38 As seen from the above description, fanning out measurement requests to
39 multiple FAP (sensing the MS on the reverse link) as potential hand-in
40 targets and dealing with their responses is all done within the femtocellular
41 system. From the perspective of the macro BS and the MSC, the procedure
42 is identical to hard handoff to a BS in another MSC. The source macro BS
43 only needs to be configured with a value of ICGI (Target MSC ID and Target
44 Cell ID) for each pilot PN assigned to FAPs in the area.

45

1 **5.7.1.2.2.2 FAM Hand-In**

2 A FAM equipped with a PUZL database (see Section 5.2.4), and either
3 capable of multi-carrier sampling (see Section 5.2.2) or containing multiple
4 receive RF chains, can offer several benefits associated with active state
5 hand-in, including:

- 6 • Reduce delay of active state hand-in;
- 7 • Be independent from the FAP beacon to trigger the hand-in
8 procedure, thus allowing the possibility of FAP operation that does
9 not rely on pilot beacons;
- 10 • Reduce incidence of adjacent channel interference to the FAP caused
11 by FAMs in active state on the macrocellular system near a FAP;

12 When a FAM in the active state detects that it is in the zone described in one
13 of its PUZL entries, it can start multi-carrier sampling encompassing the
14 frequency on which the FAP is deployed. Alternatively, if a FAM has
15 multiple receive chains (e.g., for the purpose of simultaneous HRPD
16 operation while monitoring cdma2000 1x paging channel, or for receive
17 diversity), it can engage an additional receive RF chain to measure the
18 femtocell frequency of deployment to detect FAP pilot. In this regime, the
19 FAM uses sampled material from the current macro-only RF carrier for
20 normal receiver function in the active state processing, but it uses sampled
21 material from the FAP frequency for the purpose of monitoring relative
22 strength of pilots and triggering PSMM. Hence, the FAM will transmit the
23 PSMM as soon as it detects FAP's pilot relative strength in excess of handoff
24 threshold, i.e., it will not depend on the hopping beacon cycle for such
25 detection. This reduces hand-in delay, thus maximizing the usage of
26 femtocell resources by reducing the dwell time of the FAM in the vicinity of
27 the FAP. This reduction of dwell time can translate into an important
28 performance enhancement associated with adjacent channel interference
29 (see Section 5.4 on RF Interference Management). If it happens that the
30 macrocellular frequency used by this call is adjacent to the FAP frequency,
31 and if the macro coverage in the FAP locality is weak, it would translate to
32 MS using high transmit power. While in this hand-in dwell situation, this
33 can result in significant adjacent channel reverse link interference with the
34 FAP.

35 In cdma2000 1x Revision E, FAP paging channel can transmit the Access
36 Point Identification message (refer to the Section 5.2.3 on FAP Discovery)
37 which contains the values of its Target MSC ID and Target Cell ID. If there
38 is a hand-in trigger to this FAP, the source (macro) BS can use this
39 information to initiate handoff. The MS reports the values of MSC ID and
40 Cell ID during handoff. Thereafter the source (macro) BS continues hard
41 handoff procedure as described in Section 5.7.1.2.2.1.

42 **5.7.2 HRPD Procedures**

43 HRPD procedures largely parallel those for cdma2000 1x. The only small
44 exception is for the case of idle (dormant) state handoffs, as discussed
45 below.

1 **5.7.2.1 Idle Handoff Procedures**

2 In HRPD, additional complexity in idle handoff procedures arises from the
3 need to transfer HRPD session between the macro AN and the HRPD FAP.
4 Without HRPD session transfer, the AT needs to close and re-negotiate the
5 HRPD session upon every handoff between macro AN and the HRPD FAP.
6 HRPD session transfer can be accomplished via A13 interface (see A.S0024
7 [1]).

8 While it is simple to configure a FAP with the IP address of the source macro
9 AN from which to request an HRPD session, it is more complex for the
10 existing macro AN to be configured with all of the IP addresses of FAPs that
11 the macro AN may need to request a session. Therefore, for hand-in the
12 Femtocell Gateway (FGW) is used as A13 Interface Proxy for FAPs. The
13 macro AN requests the HRPD session for an AT through the FGW. The FGW
14 thereafter relays the request to the appropriate FAP (see A.S0024-0 [1]).

15

16 **5.8 Services Aspects of Femtocell Systems**

17

18 **5.8.1 Local IP Access (LIPA)**


19 This service is applicable to HRPD air interface, and has two distinct
20 aspects:

- 21 • Servers locally connected to the FAP can be accessible by the AT
22 connecting through the femtocell. For example, a media server, nanny
23 cam, or home automation controller can be accessed directly from the
24 AT, i.e., femtocell provides similar functions to a Wireless LAN access
25 point.
- 26 • Direct access to the Internet can be achieved by the AT through the
27 landline broadband access while bypassing the cellular core network.
28 This offloads Internet traffic from the cellular core network via femtocells,
29 reducing required resources for data services whenever a subscriber is
30 connected to a femtocell.

31 Figure 5.8-1 is a simplified diagram illustrating LIPA and RIPA (see Section
32 5.8.2) architecture.

33 For access to a local server (IP Host in the figure), an AT uses home router to
34 which the FAP and the server are connected. For access to a host in the
35 Internet, the IP packets are sent outside of the secure IP tunnel and thus are
36 forwarded by the home routers through the Internet Service Provider to the
37 IP Host.

38 LIPA uses the existing AN-PPP connection over HRPD access stream between
39 the AT and the FAP. The AN-PPP connection, previously used only for HRPD
40 access authentication, has been modified to support LIPA, as elaborated in
41 detail in A.S0024 [1]. 3GPP2 specification does not include LIPA support for
42 legacy ATs.

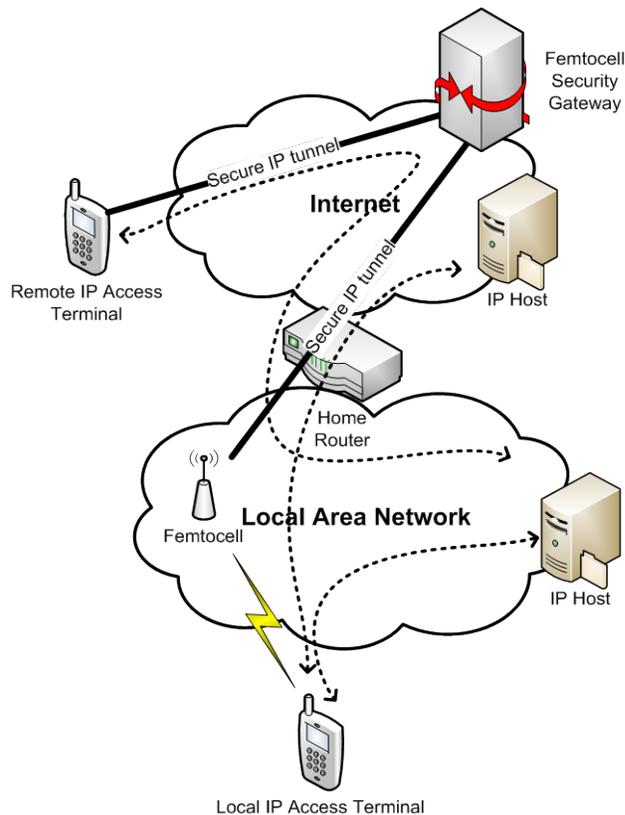

1
2 Figure 5.8-1: Simplified LIPA/RIPA Architecture

3 **5.8.2 Remote IP Access (RIPA)**

4 Typically, home networks or enterprise networks are protected by firewalls
5 which can prevent any access initiated by IP hosts from outside of the
6 firewall. Furthermore, an IP host located in a LAN may not have a public IP
7 address and therefore can only be accessed by other IP hosts that also have
8 local IP addresses within that LAN. RIPA is a service that allows an
9 authorized cellular subscriber to remotely access a local network, similar to
10 Virtual Private Network (VPN) service, via the femtocells. For details, refer to
11 X.S0059-100 [13].

12 RIPA makes use of the AT's security credentials to automate the
13 authentication and authorization of the AT's access to the local network.
14 Furthermore, it also reuses many existing functions that the femtocell has,
15 for example, the IPsec connection between the femtocell and the core
16 network.

17 An AT using RIPA service is assigned an IP address from the network in
18 which the femtocell resides. RIPA IP packets are routed between the AT and
19 the local network through the secure IP connection traversing Network
20 Address Translator (NAT) and firewall.

22 **5.8.3 Emergency Call Services**

23 Emergency call service is supported with femtocells.

1 When determining location of the user who placed the emergency call, the
2 location of the strongest adjacent macrocell will be used instead for the
3 purpose of routing the call to the correct PSAP. Precise location
4 information for the purpose of dispatching assistance to the caller is
5 supported by the femtocell specifications.

6

7 **5.8.4 Supplementary Service Support**

8 All the CS supplementary services subscribed to by the user can be
9 supported when the user is under the coverage of a femtocell. For details,
10 refer to X.S0059-400 [13].

11 **5.9 Minimum Performance Standards**

12 **5.9.1 Introduction**

13 The existing cdma2000 BSs/ANs are governed by the minimum performance
14 specifications (MPS) defined in C.S0010-C v2.0 [25] and C.S0032-B v1.0
15 [26]. Originally, these specifications were developed for macrocells for wide
16 area network applications. However, femtocells have significantly different
17 operation and design criteria as well as business case compared to
18 macrocells. For example, femtocells have low transmit power since they are
19 typically intended for indoor coverage with a small footprint whereas
20 macrocells are intended for large, ubiquitous indoor as well as outdoor
21 coverage. Given these differences, requiring femtocells to meet the same
22 specifications as macrocells, such as supporting high speed (e.g., 100 km/h)
23 users, burdens these consumer devices with unnecessary design complexity.
24 Thus, there is a need to define different MPS requirements for femtocell base
25 stations. With this in mind, MPS for cdma2000 femtocell base stations were
26 defined to guide femtocell developers, vendors, operators and the technical
27 community at large.

28 The main thrust of the work is to standardize separate MPS requirements
29 for femtocells by studying and modifying (relaxing or making more stringent,
30 as the case may be) the existing MPS requirements, and also defining any
31 new requirements that are needed for femtocells. The distinction between
32 femtocells vs. macrocells can be made by defining a limit on the maximum
33 transmit power of femtocells and specifying requirements that apply only to
34 such low power femtocell base stations. The main test specifications
35 approved for femtocell base station MPS are described in Sections 5.9.2 and
36 5.9.3 below.

37

38 **5.9.2 Femtocell Base Station Transmitter MPS Requirements**

39

- 40 • **Maximum RF Output Power:** Limit maximum RF output power at
41 the antenna port to 20 dBm to ensure that femtocell base station has
42 a small coverage footprint.
- 43 • **Frequency Tolerance:** For low complexity design, increase (relax)
44 frequency tolerance to 100 ppb (parts per billion) compared to
45 macrocell requirement of 50 ppb such that a femtocell base station

1 can support low mobility users that will be encountered in typical
2 indoor applications.

- 3 • **Limitations on Spurious Emissions:** Make the emission limits
4 stricter for femtocells in order to protect users on channels near-by
5 the femtocell channel from femtocell interference. This is necessary
6 because the minimum coupling loss (MCL) between a user and a
7 femtocell is lower than that between a user and a macrocell.
8 Therefore, a user on a near-by channel may be adversely impacted
9 from femtocell interference without good control over spurious
10 emissions. The femtocell specification is -36 dBm/MHz for frequency
11 offsets greater than 4 MHz.
12

13 5.9.3 Femtocell Base Station Receiver MPS Requirements

14

- 15 • **Receiver Sensitivity:** Femtocell base station receiver (Rx) sensitivity
16 is relaxed to -110 dBm in order to reduce design complexity. With
17 small coverage footprint, femtocell reverse link budget can still be met
18 by MSs even with relaxed Rx sensitivity, thus ensuring satisfactory
19 performance.
- 20 • **Receiver Dynamic Range:** The upper limit of the dynamic range of
21 femtocell base station is increased to the maximum received power of
22 -39 dBm per RF input port from the -65 dBm requirement for
23 macrocell base station. This increase enables the femtocell base
24 station to handle strong reverse link (RL) signal from a MS in the
25 vicinity of a femtocell whose power is controlled by a macrocell.
- 26 • **Single Tone Desensitization, Inter-modulation Response, and**
27 **Receiver Blocking:** These requirements are relaxed to reduce design
28 complexity and enable practical receiver designs. Modifying these
29 requirements does not affect femtocell RL performance because RL
30 link budget can still be met by the MS in the presence of a jammer
31 due to smaller femtocell coverage footprint. For the single tone de-
32 sponse test, the power of the tones that are at 900 kHz and 1.25 MHz
33 offset from the center frequency is reduced to 65 dB relative to MS
34 power. The power of the CDMA waveform, relative to the MS power,
35 is reduced to 63 dB for the inter-modulation response test. The out-
36 of-band receiver blocking test is also relaxed such that the blocker
37 level is 91 dB instead of 100 dB.
- 38 • **Demodulation Performance:** Test for femtocell receiver
39 demodulation performance is defined only for additive white Gaussian
40 noise (AWGN) and low speed, single path channel conditions that are
41 typically encountered in femtocell deployments. The 8 km/h 2-path
42 and 100 km/h 3-path channel tests in the macro base station
43 specification do not apply to femtocell base stations.
44