

Technologies for LTE-Advanced



Michael Ohm, Volker Braun, Uwe Doetsch, Cornelis Hoek, Howard Huang, Hans-Peter Mayer,
Le Hang Nguyen, Michael Schmidt, Reinaldo Valenzuela, Sivarama Venkatesan, Andreas Weber, Thorsten Wild

Bell Labs, Radio access domain

Wireless Communication and Information, October 2008

Agenda

1. Introduction
2. Advanced MIMO schemes
3. Advanced single-site MIMO schemes
4. Advanced multi-site MIMO schemes
5. Conclusion

1

Introduction 3GPP LTE and LTE-Advanced

3GPP LTE and LTE-Advanced

- 3rd Generation Partnership Project (3GPP)
 - Standardization group consisting of operators, network and handset suppliers, etc.
- Standardization of UMTS and its successor Long Term Evolution (LTE)
- Standardization of LTE finished (is now in maintenance phase)
- Standardization of successor to LTE started
 - Successor is LTE-Advanced


Where do we start?

Key features of LTE

- Air interface
 - OFDMA in downlink (orthogonal frequency division multiple access)
 - SC-FDMA in uplink (single-carrier frequency division multiple access, i.e. DFT-spread OFDM)
- Scalable bandwidth: 1.25 MHz up to 20 MHz
- Frequency-reuse 1 system: Neighboring cells w/ the same carrier frequency
- Multiple transmit and receive antennas at the eNodeB (i.e. base station)
- Single transmit and multiple receive antennas at UE (i.e. mobile station)
- Focus on FDD, but TDD option is also standardized (frequency/time division multiple access)
- Flat hierarchy in radio access network (RAN)

Where do we start?
Multi-antenna schemes in LTE

Multi-Antenna / MIMO schemes are an integral part of 3GPP LTE

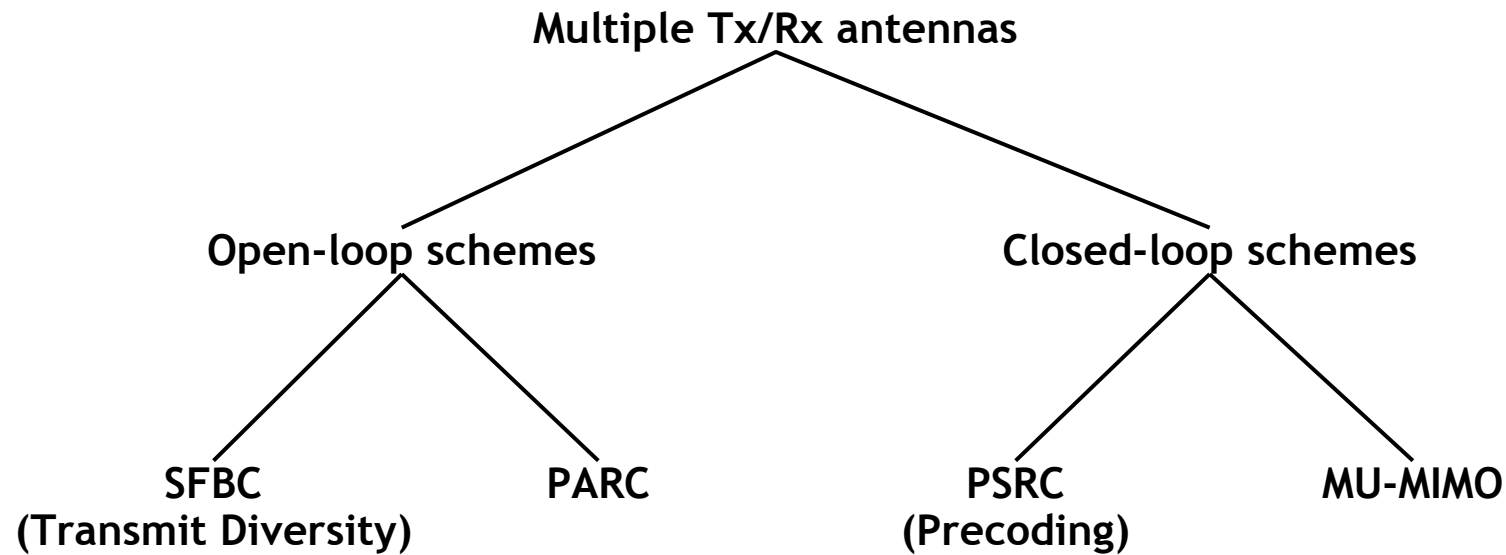

**LTE MIMO schemes are single-site schemes
(i.e. operation per cell)**

PARC ... Per antenna rate control
PSRC ... Per stream rate control
MU ... Multi user
SFBC ... Space-frequency block coding


Where do we want to go?

Ambitious performance improvements for LTE-Advanced

LTE-Advanced performance targets:

- **High peak data rates** of 1 Gbit/s in the downlink (DL) and 500 Mbit/s in the uplink (UL)
- **High peak spectrum efficiencies** of 30 bit/s/Hz in the DL and 15 bit/s/Hz in the UL using antenna configurations of up to 8x8 in the DL and 4x4 in the UL
- **High average spectrum efficiencies** of up to 3.7 bit/s/Hz/cell in the DL (4x4) and 2.0 bit/s/Hz/cell in the UL (2x4)
- **High cell edge spectrum efficiencies** of 0.12 bit/s/Hz in the DL (4x4) and 0.07 bit/s/Hz in the UL (2x4)
- **High spectrum flexibility**, e.g. spectrum allocations up to 100 MHz
- Backward compatibility to LTE
- Performance targets in 3GPP TR 36.913 v8.0.0 “Requirements for Further Advancements for E-UTRA (LTE-Advanced)”, June 2008

Candidate Technologies for Performance Improvements with LTE Advanced

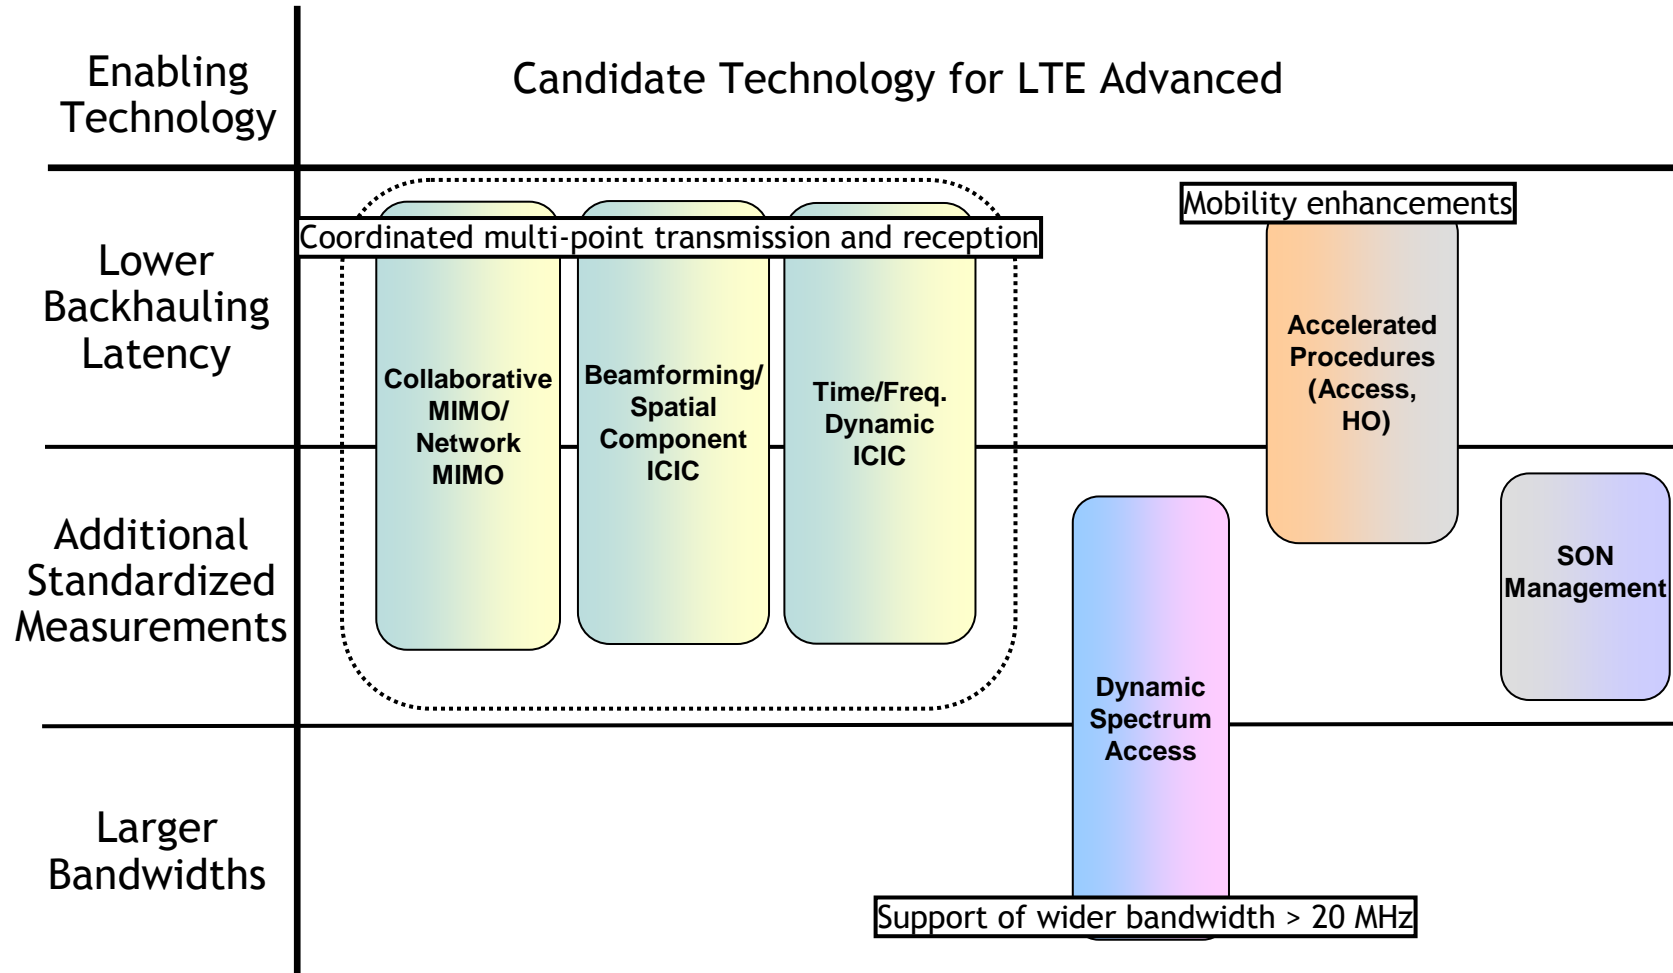


2



Advanced MIMO schemes


Generalized spatial multiplexing

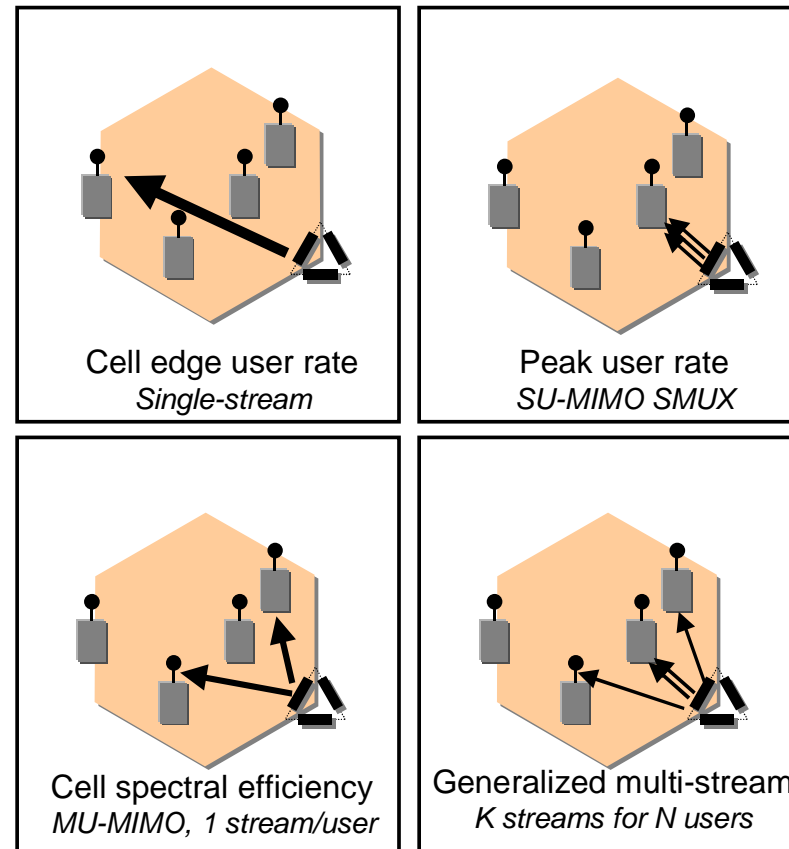- With M base station antennas, it is possible to transmit up to M spatial streams.
- Generalized spatial multiplexing distributes M streams optimally on a frame-by-frame basis.
 - Performance will be better than SU-MIMO or MU-MIMO alone because each is a special case.
 - Adapts transmission strategy for each mobile individually based on the number of antennas.



Key technologies in Multi-mode Adaptive MIMO


 Data + Sync Protocol for DL (Extension of eMBMS protocol); Data + Channel Estimates for UL
 **MIMO channel**

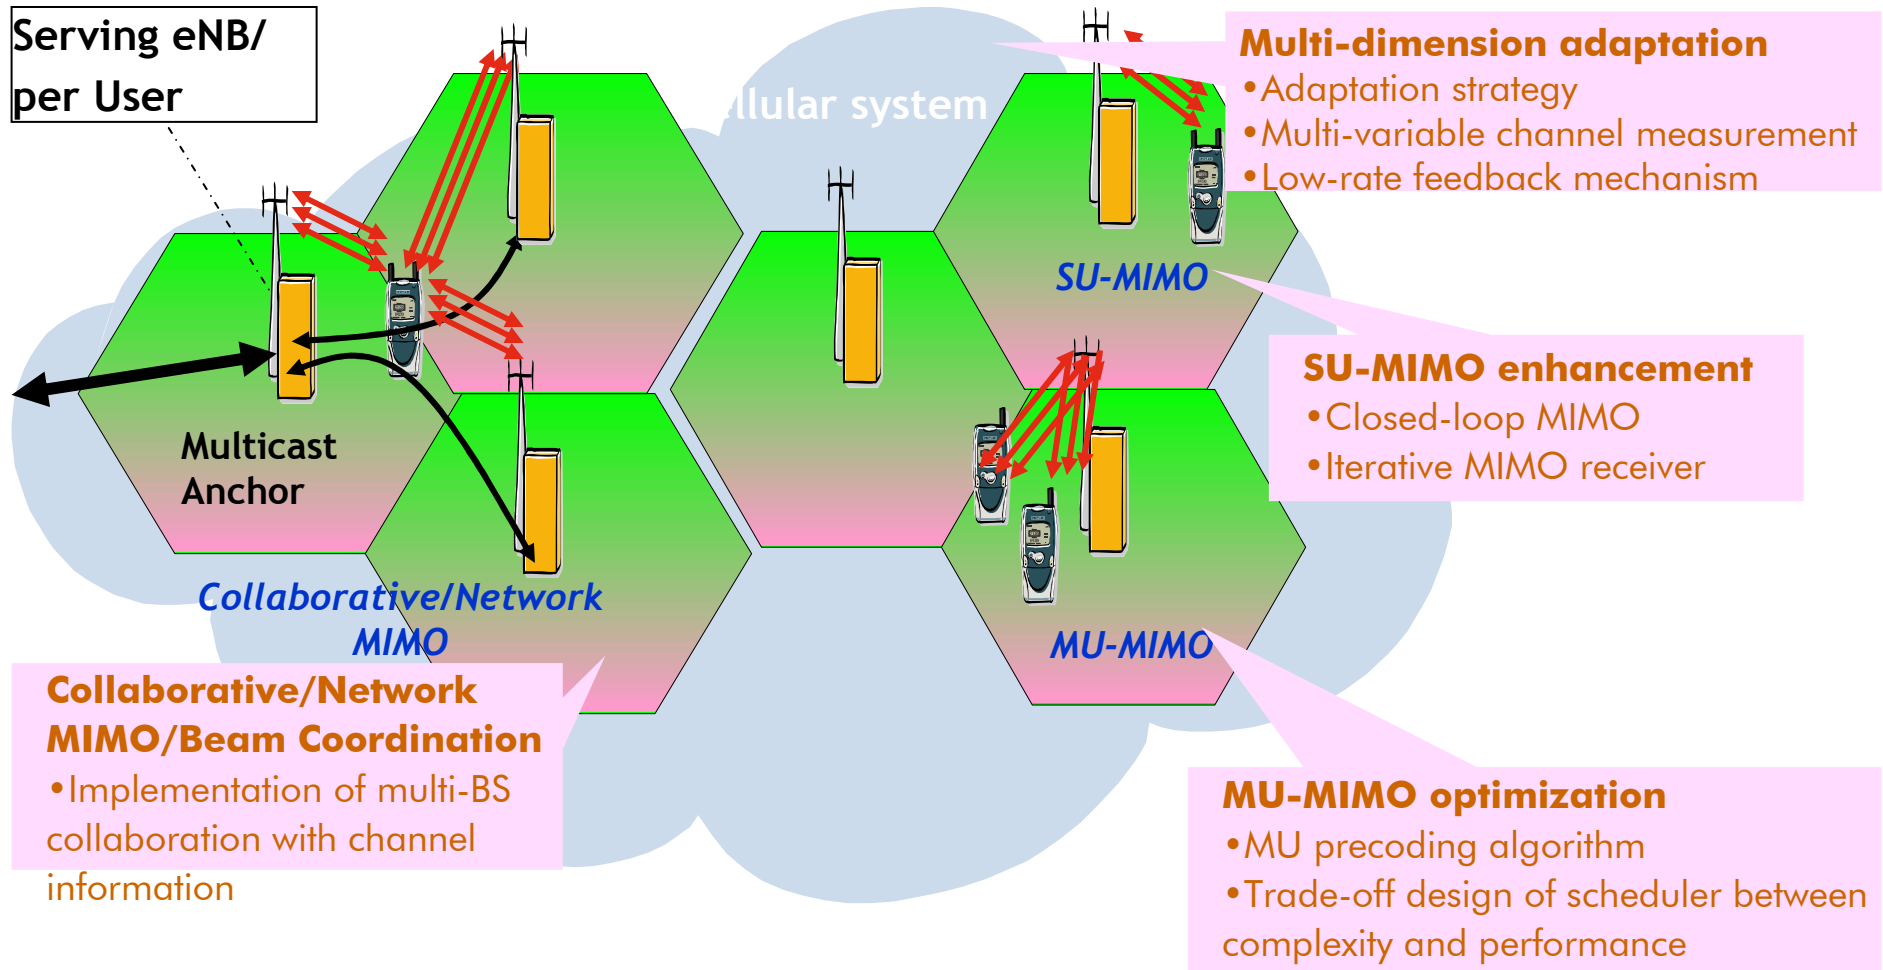

Multi-Mode Adaptive MIMO for DL/UL

Use adaptive MIMO to accommodate demand of higher data rate and wider coverage in next generation broadband wireless access

- SU MIMO for peak user data rate improvement
- MU MIMO for average data rate enhancement
- Collaborative/Network MIMO for cell edge user data rate boost

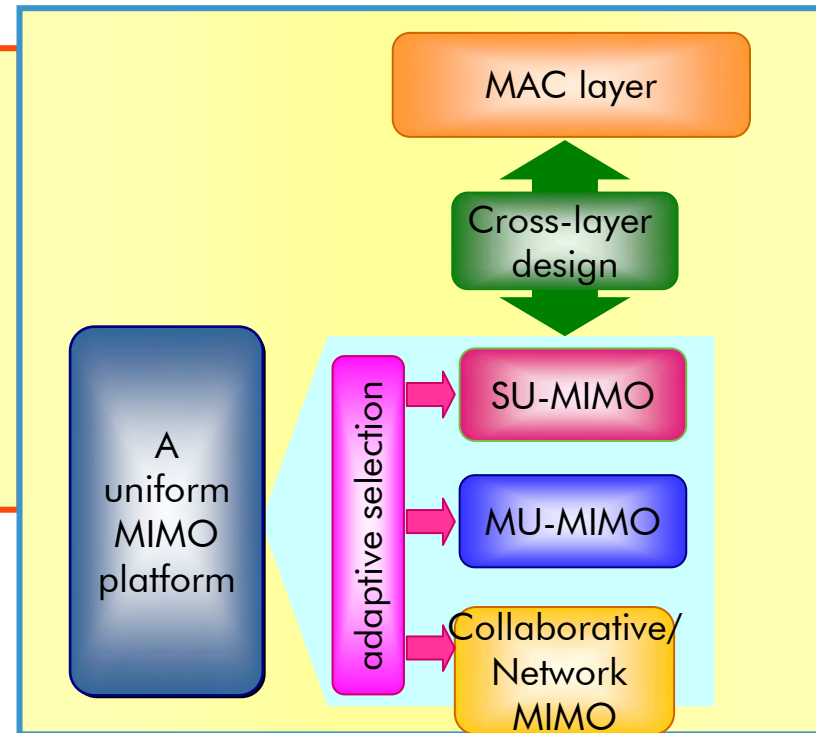


3

Advanced single-site MIMO schemes

New radio systems for LTE advanced adaptive 4x2 SU-MIMO with dual X-pol transmit arrays


- Exploit combination of:
 - **Beam switching** (always used, low dynamic, low feedback periodicity) **plus**
 - **Open loop TX diversity** in case of high velocity and bad channel quality (no feedback required)
 - **Closed loop TX diversity** in case of low velocity and bad channel quality (higher feedback rate)
 - **Closed loop spatial multiplexing** in case of low velocity and good channel quality (higher feedback rate)

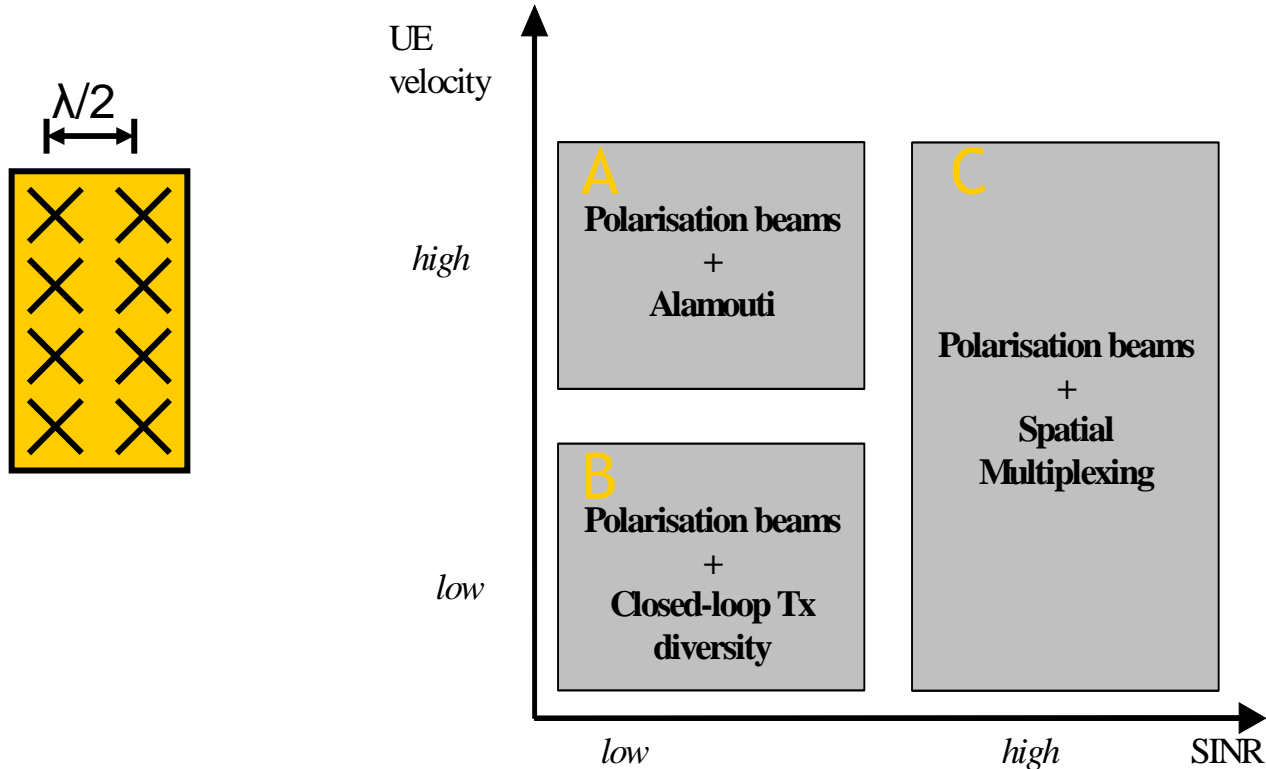

Main Advantage:
low feedback
bitrate ->
higher used data
rate in the UL

New radio systems for LTE advanced : Downloadable pre-coding code-books (II)

Adaptive 4x2 SU-MIMO System Performance

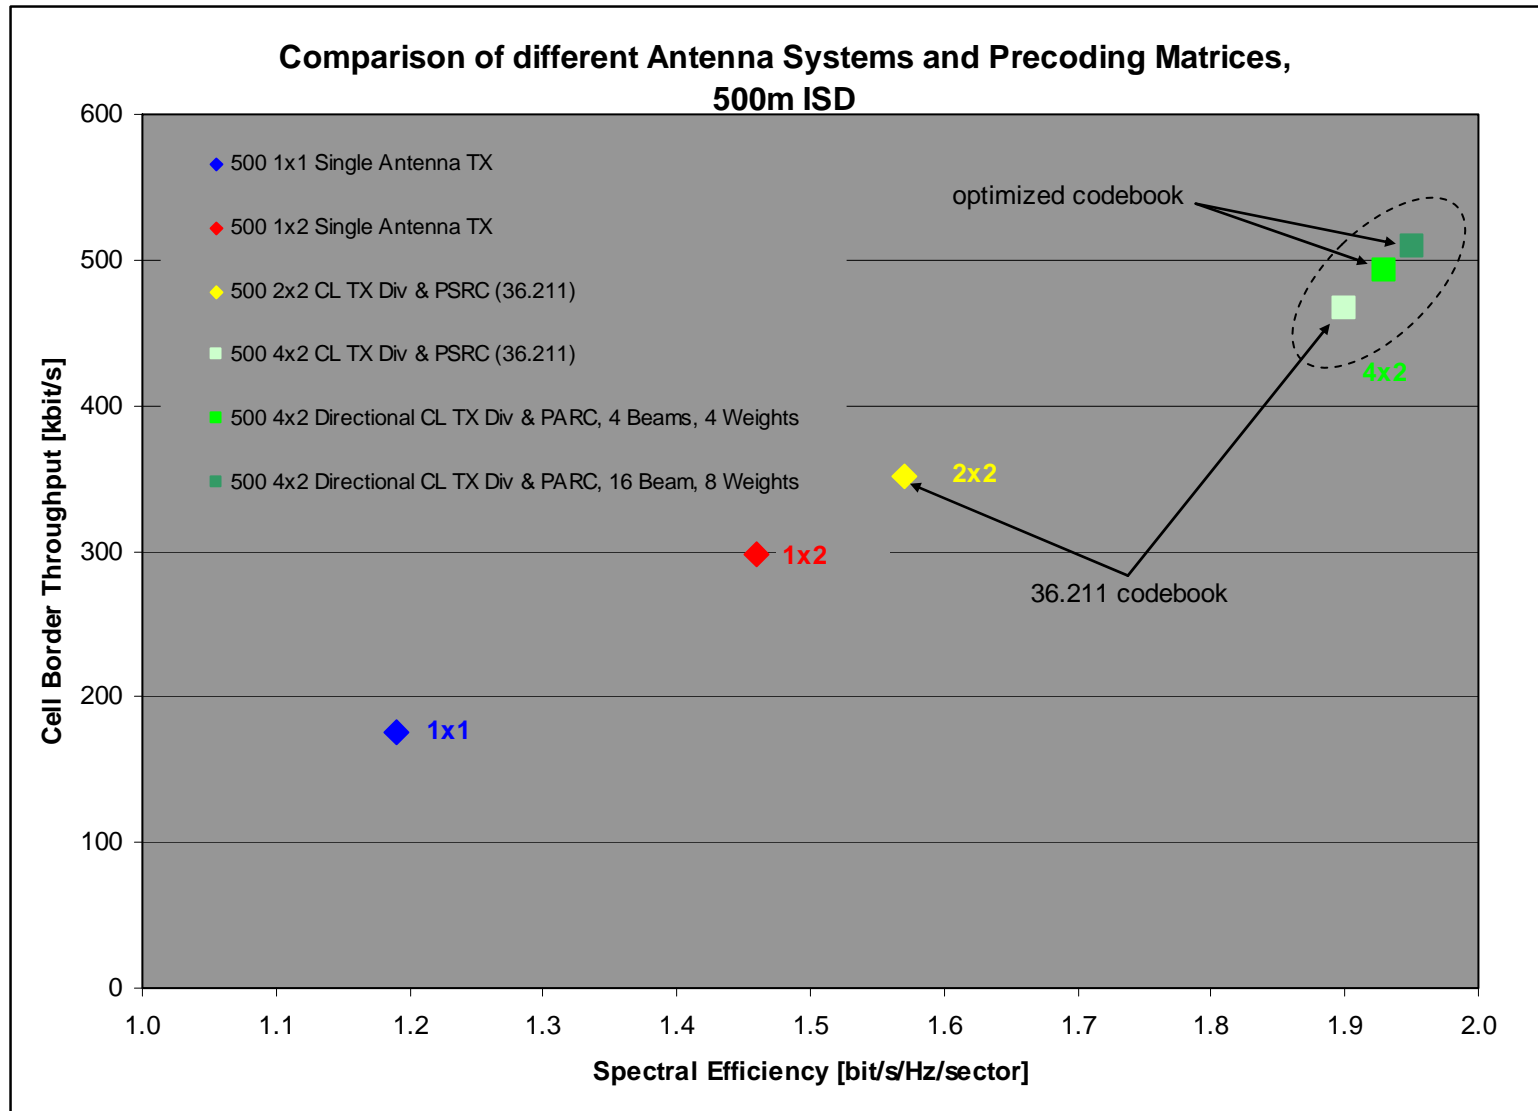


New radio systems for LTE advanced

Adaptive 8x2 MU-MIMO with polarization beams

Polarization

beamforming -45° pol.

$+45^\circ$ pol.


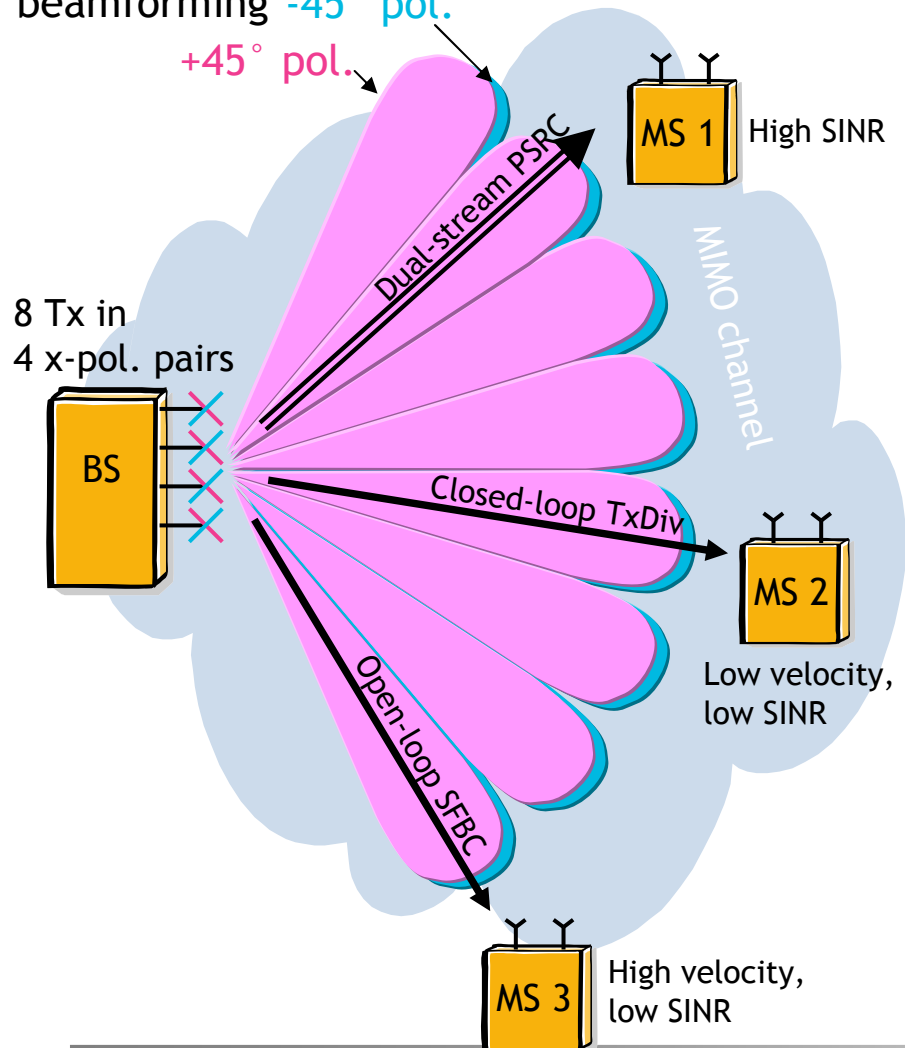


- Polarization beams for MU-MIMO
- Combination of beamforming and diversity transmission
 - Beamforming for MU SDMA based on closely spaced antenna elements ($\lambda/2$)
 - Diversity for link enhancement and spatial multiplexing, based on cross-polarized antenna elements
- Requires optimized codebooks for the antenna weights
- Up to 8 antenna elements in 4x2 X-pol. configuration in compact housing

4

Advanced multi-site MIMO schemes

New radio systems for LTE advanced SDMA using 4x2 Grid-of-fixed beams

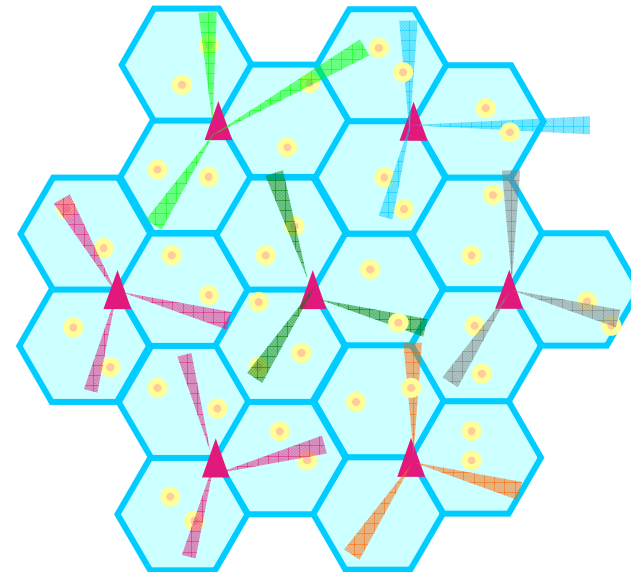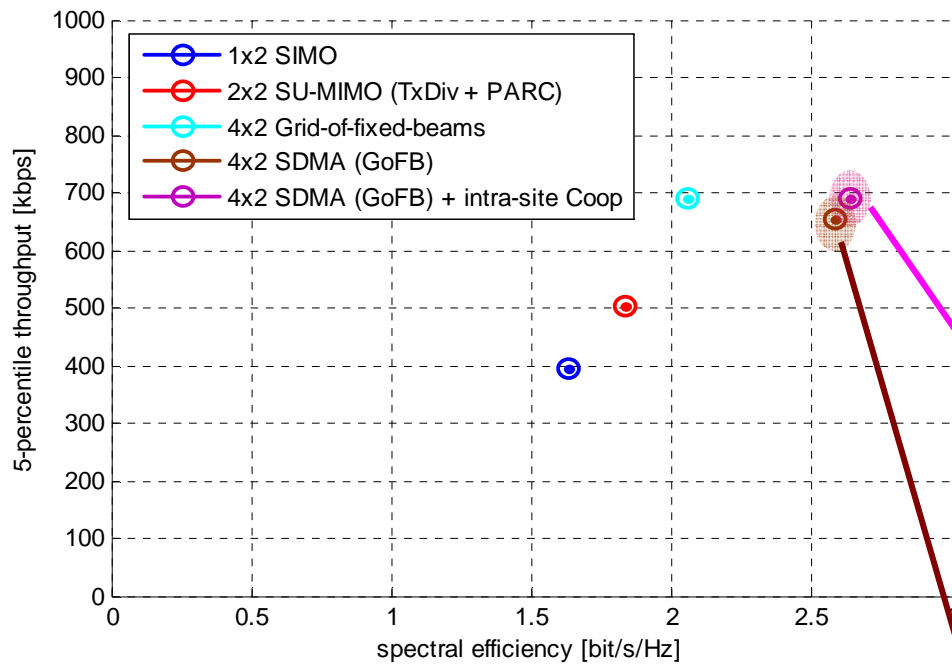

+ Inter-Node B
Co-ordination


+ Intra-Node B
BF co-ordination

SDMA w/o
BF co-ordination

7x3 cells with wrap around, av. 10 users per cell
10 MHz BW
Control and pilot overhead considered
Score based proportional fair scheduling
NGNM case 1 parameter set:

500m ISD, 3km/h, 20 dB Penetr. loss

Collaborative/Network MIMO overview

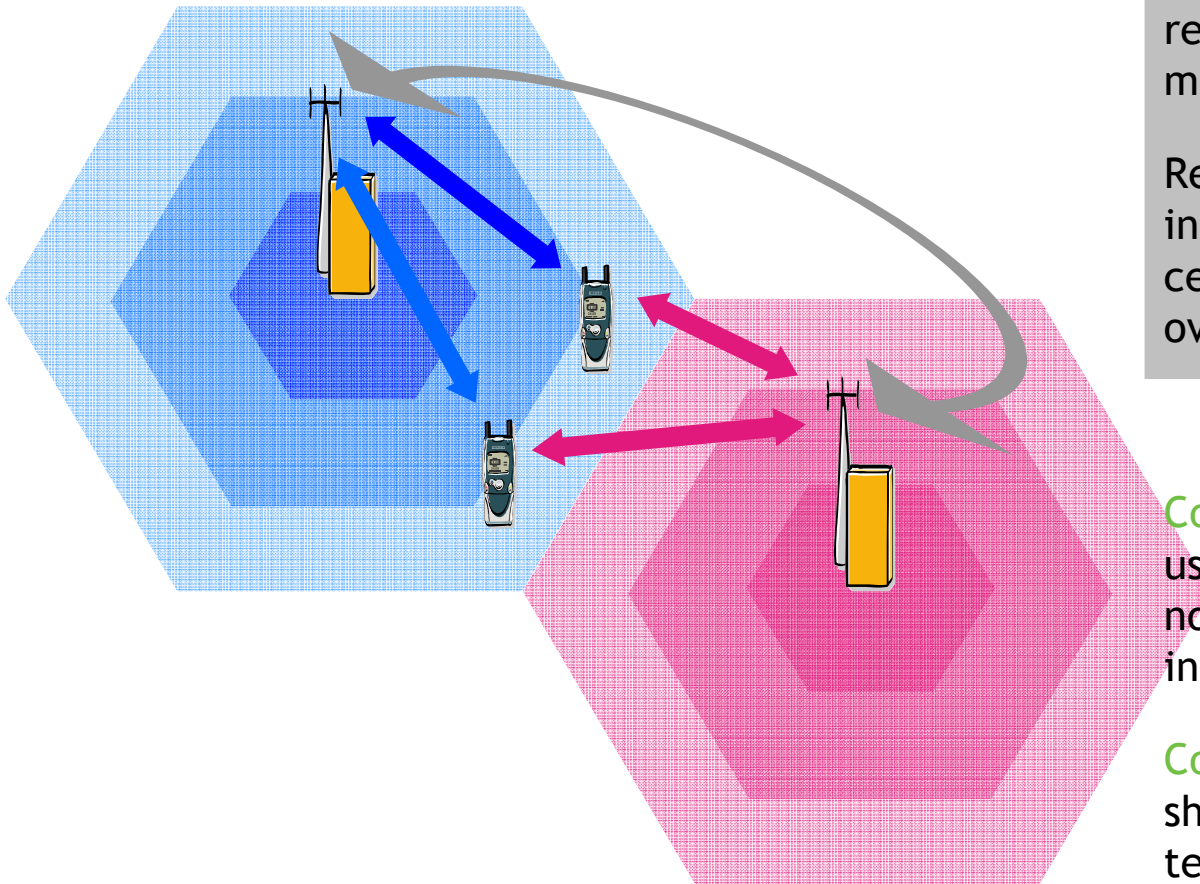

Coordinate transmission and reception of signals among multiple bases.


Reduces intercell interference and improves cell-edge performance and overall throughput.

Collaborative MIMO: share user data and long-term noncoherent channel information.



Coherent network MIMO: share user data and short-term coherent channel information.

New radio systems for LTE advanced

Multi-sector multi-user MIMO for UL - Distributed RRH

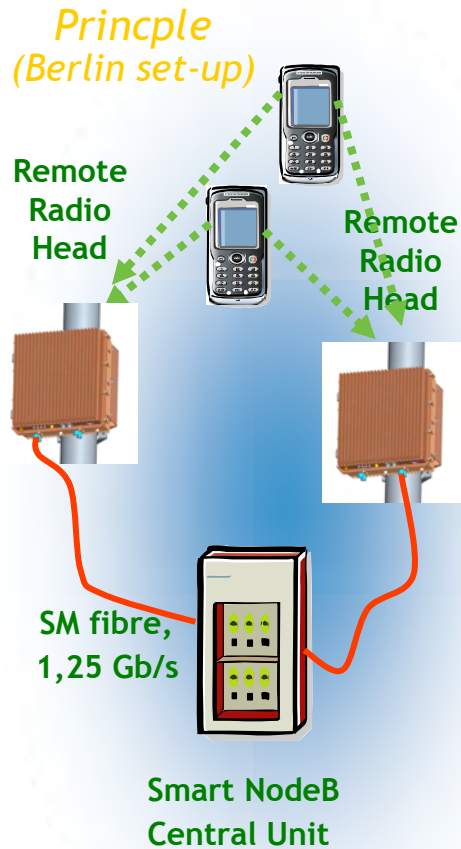

Simulation results for 1x4 antenna configuration
(QPSK 1/3, near-uncorrelated antennas)

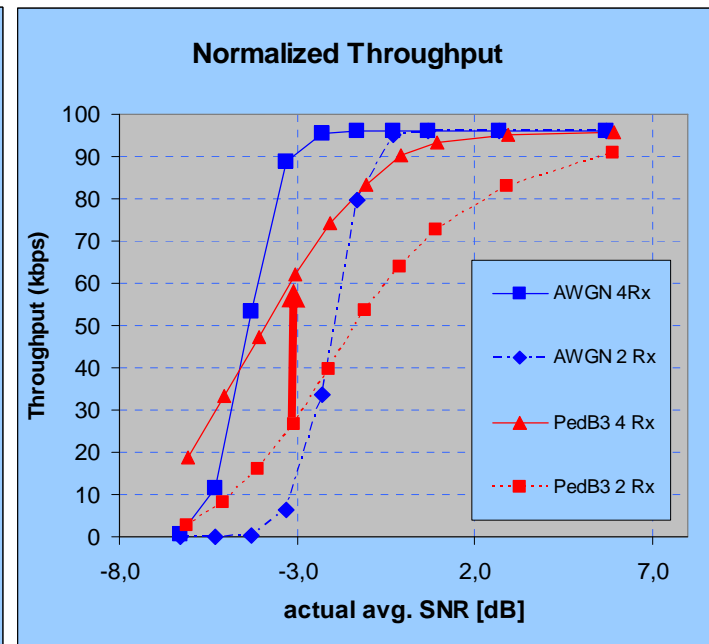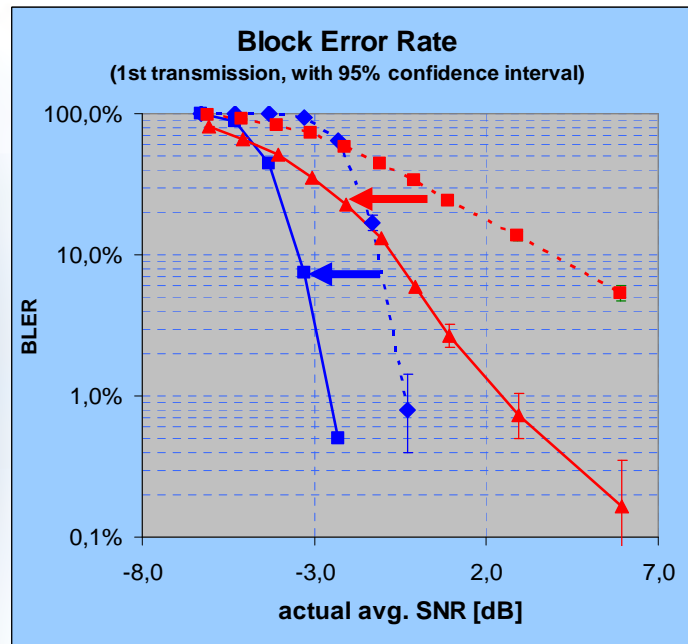

Up to 4.5 dB SNR gain
for frequency-selective channel

Throughput gain
especially on cell edge

Clear improvement of Uplink throughput for UEs at cell edge
Improved fairness → Candidate for LTE advanced

5

Conclusion

Conclusion

- Ambitious performance targets for LTE-Advanced
- Enhanced single-site transmission schemes
- Introduction of multi-site transmission scheme
- Adaptive selection of schemes in the network for optimal performance

The image features a blue background with a fine grid pattern. Overlaid on this are several abstract, glowing light patterns, including a large, curved, bright blue shape at the top and several concentric, glowing white and light blue lines at the bottom. The text 'www.alcatel-lucent.com' is centered in the middle of the image in a white, sans-serif font.

www.alcatel-lucent.com